


# CPS LED LIGHTING

## PRODUCT ORDERING GUIDE: RECESSED LINEAR (LR SERIES)

SAMPLE:  
CPS-LR-26-40-T

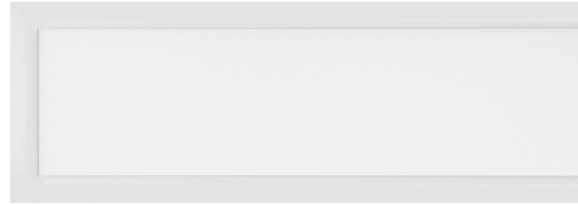

BASE MODEL:  
 LR

LENGTH:  
 2 FT  
 4 FT  
 8 FT

APERATURE:  
 4 INCHES  
 6 INCHES

CCT:  
 40T  
 30K  
 35K  
 40K  
 50K

CCT ADJUSTABLE (3000K, 3500K, 4000K)  
3000K  
3500K  
4000K  
5000K

OPTIONAL FUNCTIONS:  
 EMERGENCY  
 SENSOR



**CPS LED LIGHTING**  
843-407-6803  
SALES@CPSLED.COM  
WWW.CPSLED.COM

# CPS LED LIGHTING

Applications:


Offices

Hallways

Multipurpose Rooms

Conference Rooms

## Architectural Linear: LR Series Recessed

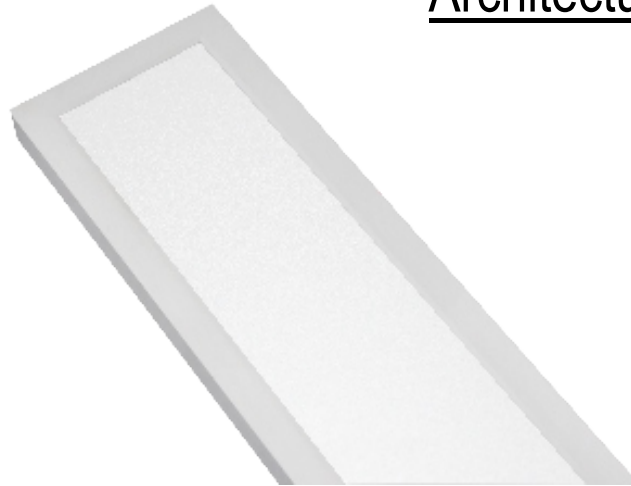

### TECHNICAL CHARACTERISTICS

Color temperature	3000K/3500K/4000K
Input voltage	AC120-277V 50/60Hz
Lumens	1600 LM-1700 LM
Waterproof rating	uCLus for damp location
CRI	>80
PFC	>0.9
Viewing Angle	120°
Light distribution	Uplight 45%, Downlight 55%
THD	<20%
Dimmer	Lutron ® Diva-Dvtv, Leviton ® IP-710-DL
Application	Indoor
L70 Life	Projected 50,000 hours
Warranty	7 years

### DIMENSIONS

PART NO.	LENGTH (IN)	WIDTH (IN)	DEPTH (IN)
4"x2'	23.7	3.74	2.17
4"x4'	47.76	3.74	2.17
4"x8'	95.75	3.74	2.17
6"x2'	23.7	5.75	2.17
6"x4'	47.76	5.75	2.17
6"x8'	95.75	5.75	2.17




CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

# CPS LED LIGHTING

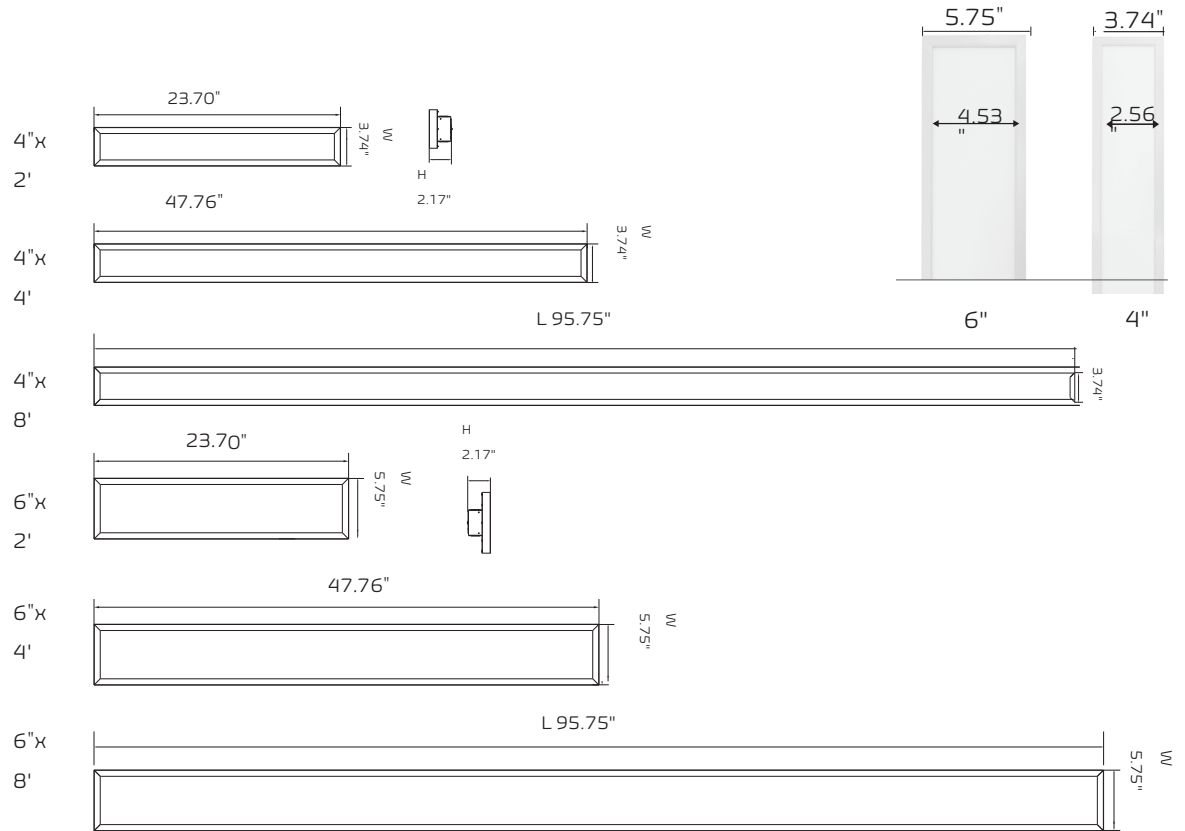

## GENERAL SPECIFICATIONS

MODEL	DIMENSIONS	WATTAGE	CCT ADJUSTABLE	LUMINOUS FLUX
	4"x2'	20W	3000K	1600 LM
			3500K	1800 LM
			4000K	1700 LM
	6"x2'	20W	3000K	1900 LM
			3500K	2100 LM
			4000K	2000 LM
	4"x4'	40W	3000K	3400 LM
			3500K	3800 LM
			4000K	3600 LM
	6"x4'	40W	3000K	3800 LM
			3500K	4400 LM
			4000K	4000 LM
	4"x8'	80W	3000K	6800 LM
			3500K	7600 LM
			4000K	7200 LM
	6"x8'	80W	3000K	7600 LM
			3500K	8400 LM
			4000K	8000 LM



CPS LED LIGHTING



843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

# CPS LED LIGHTING

## Photometric 4"x4' Linear

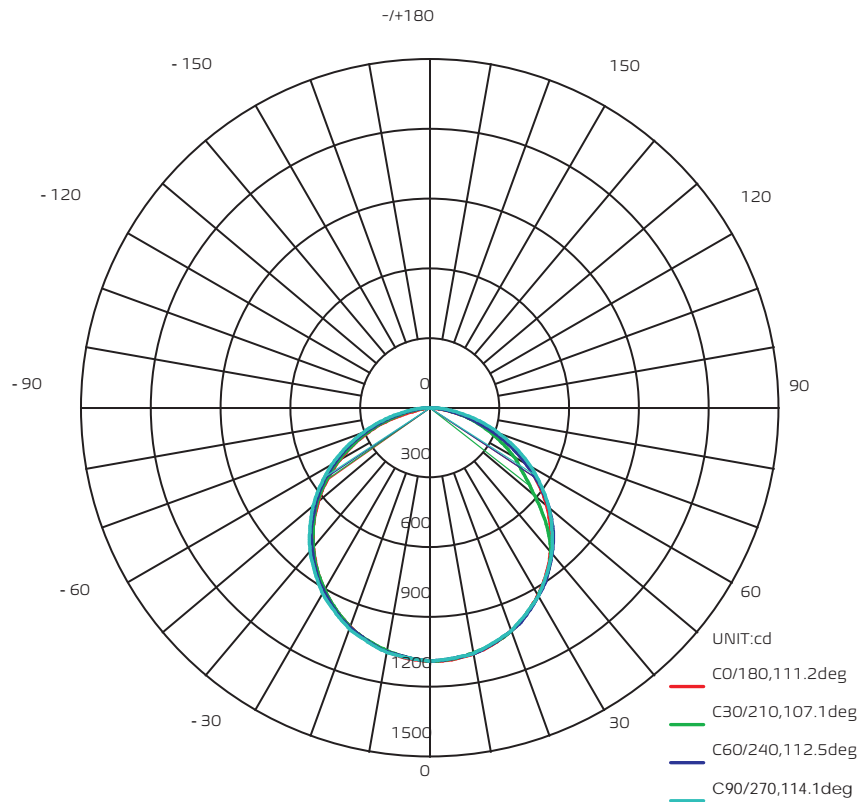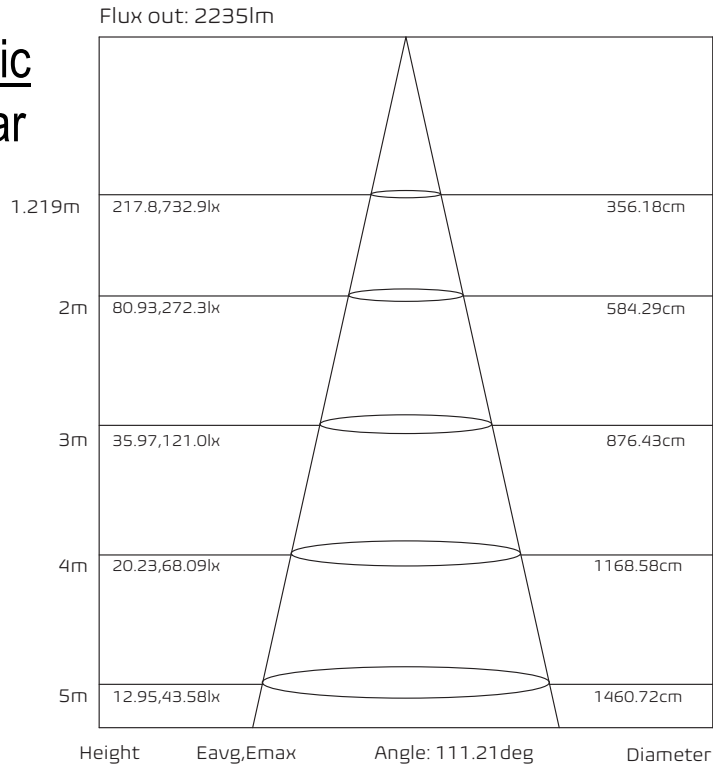

Average beam angle(50%): 111.2 Deg





**CPS LED LIGHTING**  
843-407-6803  
SALES@CPSLED.COM  
WWW.CPSLED.COM

# CPS LED LIGHTING

## Photometric 6"x4' Linear

Flux out: 3058lm

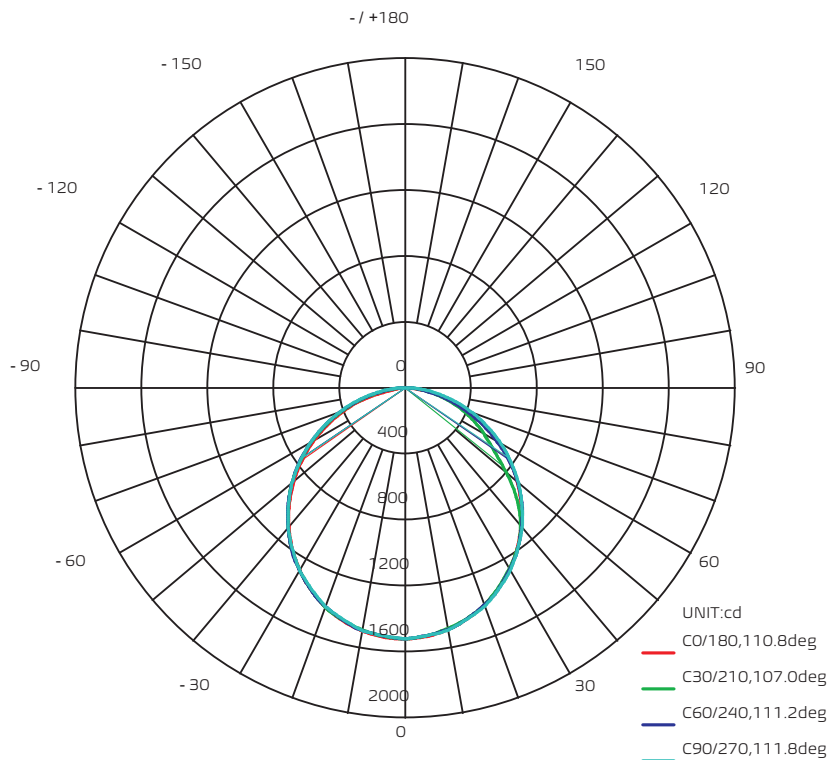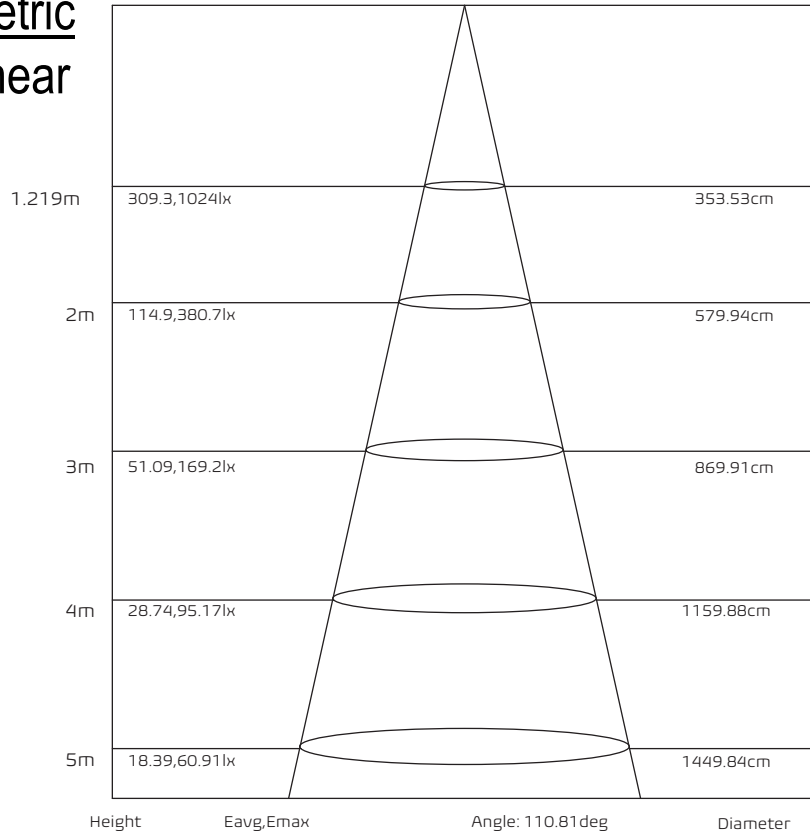

Average beam angle(50%): 110.2 deg



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM