


CPS LED LIGHTING

PRODUCT ORDERING GUIDE: LS SERIES

ARCHITECTURAL LINEAR

SAMPLE:
CPS-LS-XX-A

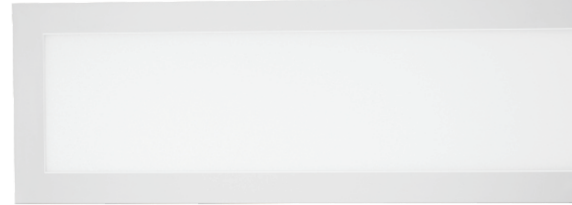

BASE MODEL:

LS

LENGTH & WATTAGE

2 FEET

4 FEET

APERTURE

4 INCHES

6 INCHES

CCT:

30F

35F

40F

50F

50K

TUNABLE / ADJUSTABLE

3000K

3500K

4000K

5000K

SYSTEM WATTAGE

WATTAGE SELECTABLE (EXCEPT FOR 2 FT FIXTURE)

FIXED WATTAGE

MOUNTING OPTION

SURFACE MOUNTED

RECESSED



CPS LED LIGHTING


843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING

Surface/ Recessed Linear: LS Series

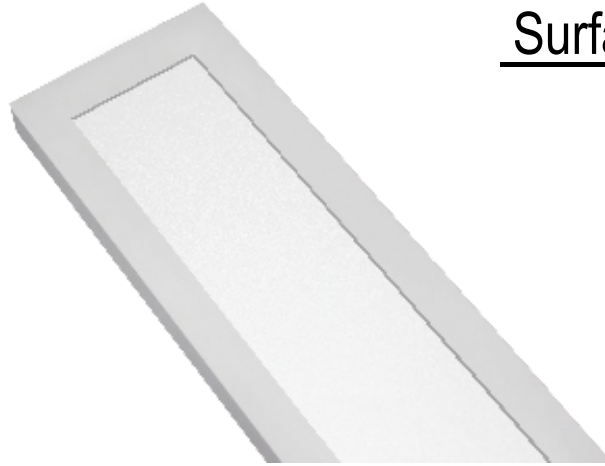

TECHNICAL CHARACTERISTICS

Color temperature	3000K/3500K/4000K
Input voltage	AC110-347 50/60Hz
Lumens	1500-1900 LM/2250-3000 LM/3000-4000 LM
Waterproof rating	uCLus for damp location
CRI	>80
PFC	>0.9
Beam angle	112°
THD	<20%
Driver	Lutron Diva-Dvtv, Leviton IP-710-DL
Ambient temperature	32°F to 122°F
Mounting	Surface Mounted, Recessed
Application	Indoor
L70 Life	Projected 50,000 hours
Warranty	7 years

GENERAL SPECIFICATIONS


MODEL	CCT ADJUSTABLE	WATTAGE SELECTION		
		LOW	MEDIUM	HIGH
4"x2'	3000K/3500K/4000K	20W (1500 LM/1700 LM/1600 LM) (NON-ADJUSTABLE)		
6"x2'	3000K/3500K/4000K	20W (1600 LM/1800 LM/1700 LM) (NON-ADJUSTABLE)		
4"x4'	3000K	20W-1500 LM	30W-2250 LM	40W-3000 LM
	3500K	20W-1700 LM	30W-2500 LM	40W-3400 LM
	4000K	20W-1600 LM	30W-2400 LM	40W-3200 LM
6"x4'	3000K	20W-1600 LM	30W-2700 LM	40W-3600 LM
	3500K	20W-2000 LM	30W-3000 LM	40W-4000 LM
	4000K	20W-1900 LM	30W-2850 LM	40W-3800 LM



CPS LED LIGHTING
843-407-6803
SALES@CPSLED.COM
WWW.CPSLED.COM

CPS LED LIGHTING

Dimensions

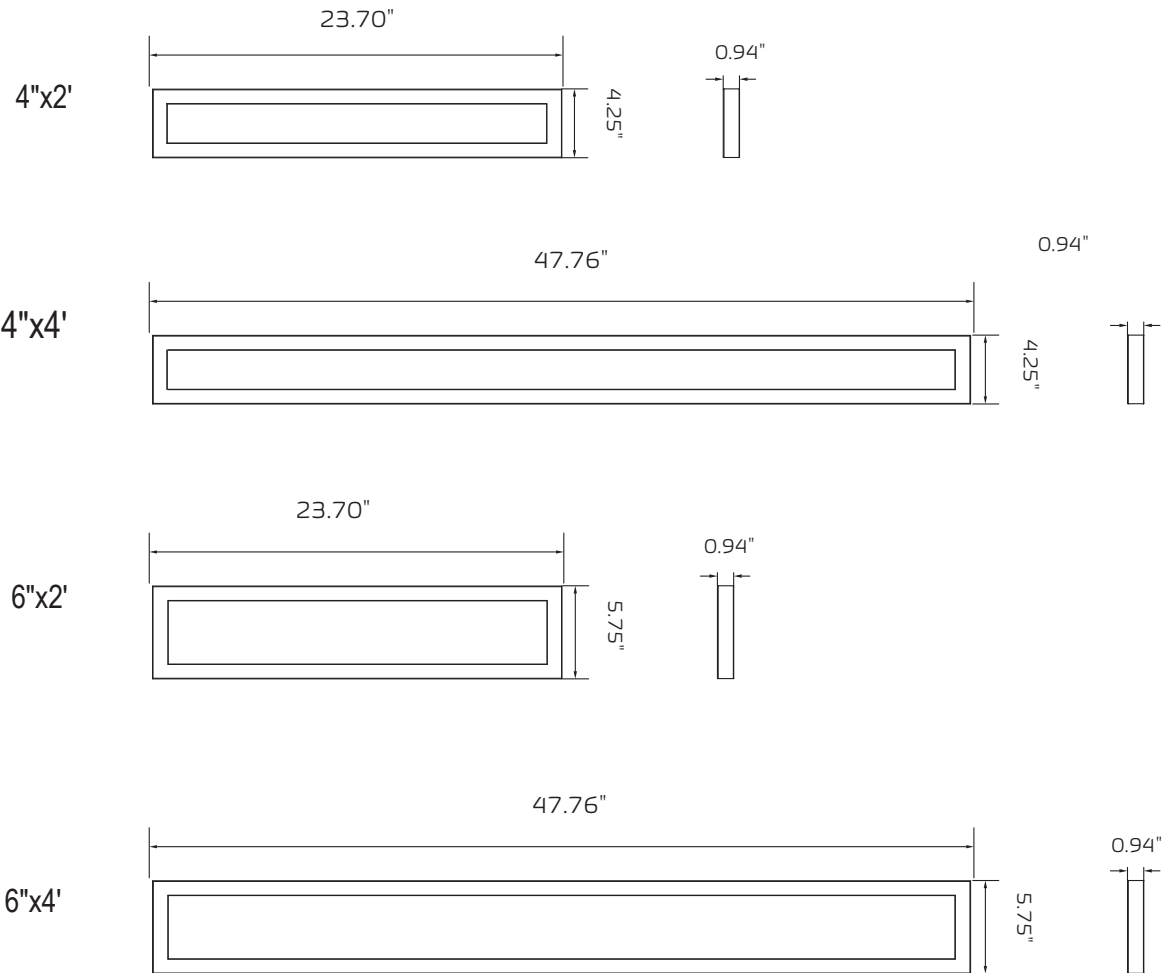

DIMENSIONS

PART NO.	LENGTH (IN)	WIDTH (IN)	DEPTH (IN)
4"x2'	23.7	4.25	0.94
4"x4'	47.76	4.25	0.94
6"x2'	23.7	5.75	0.94
6"x4'	47.76	5.75	0.94



CPS LED LIGHTING


843-407-6803

SALES@CPSLED.COM


WWW.CPSLED.COM

CPS LED LIGHTING

Photometric 4"x4' Linear

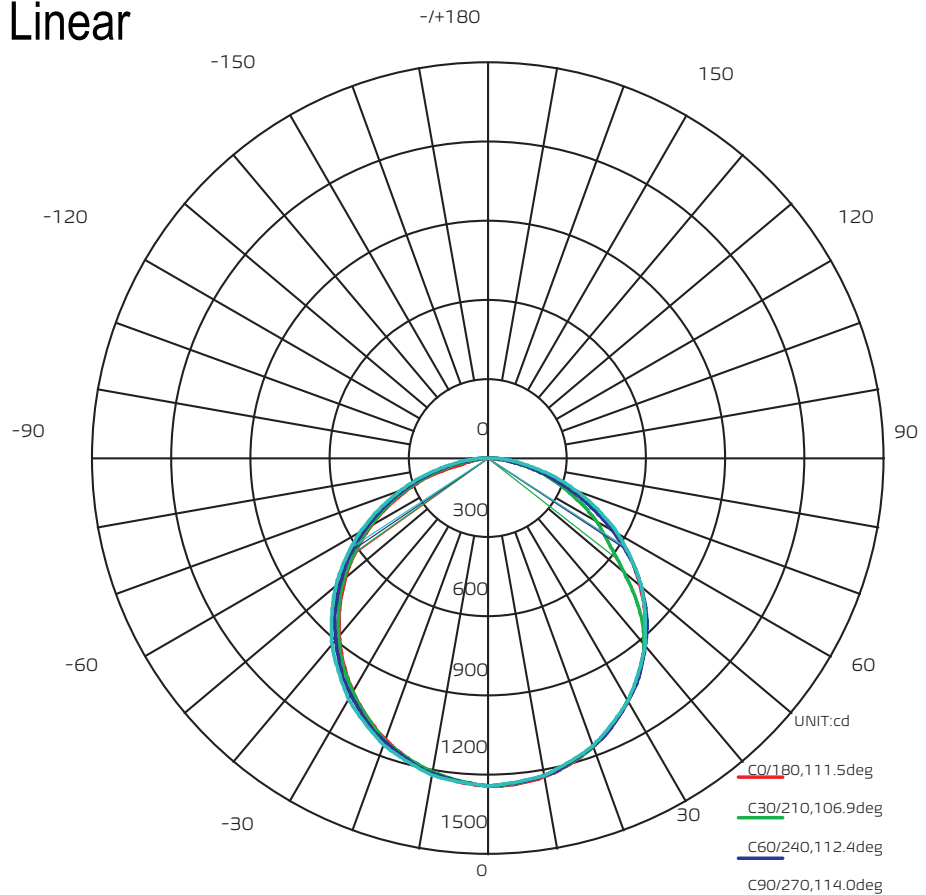

Flux out: 2544lm

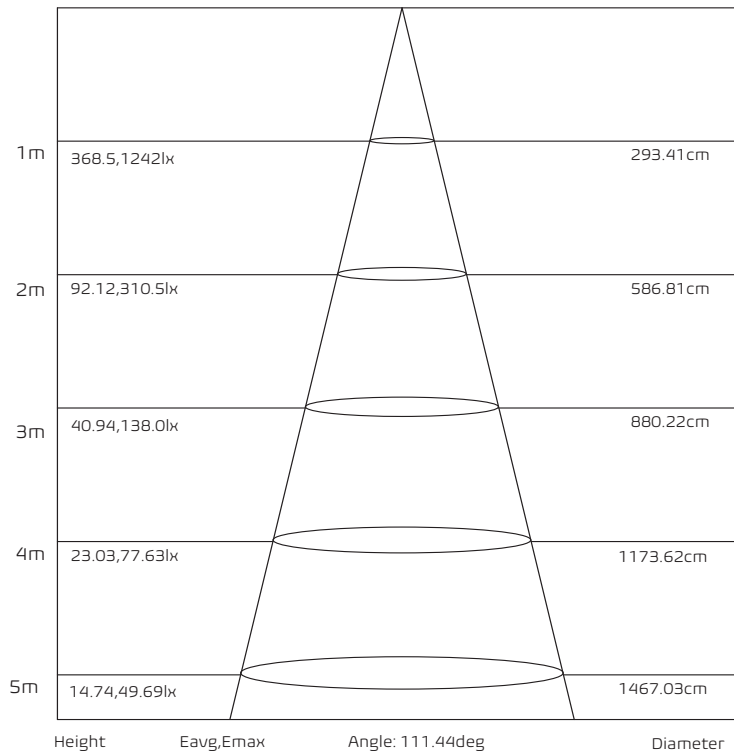

CPS LED LIGHTING


843-407-6803

SALES@CPSLED.COM


WWW.CPSLED.COM

CPS LED LIGHTING

6"x4' Linear

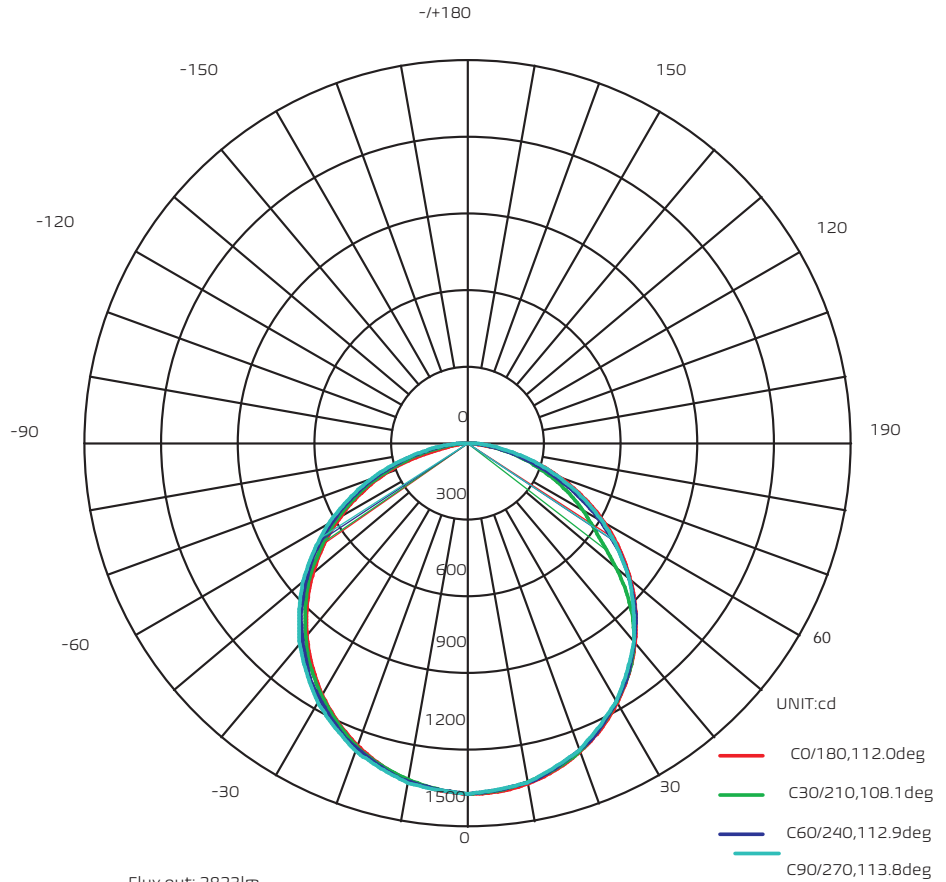

Flux out: 2823lm

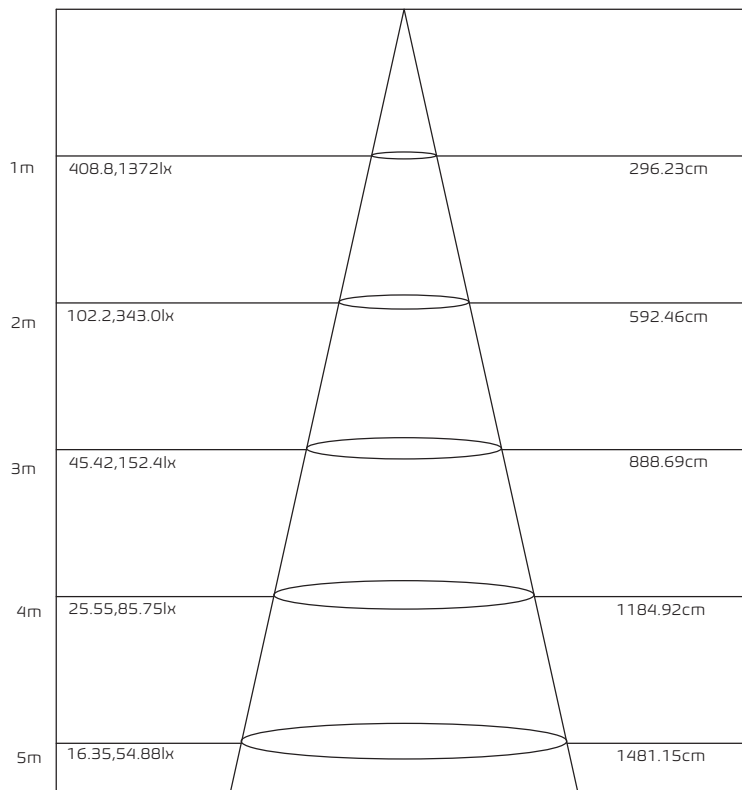

Height

Eavg, Emax

Angle: 111.95deg

Diameter



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM