

CPS LED LIGHTING

PRODUCT ORDERING GUIDE: ALR SERIES

ARCHITECTURAL LINEAR

SAMPLE:

CPS-ALR-4-20W-40-S

BASE MODEL:

TB

LENGTH & WATTAGE

2 (2' 10W)

4 (4' 20W)

DIMMING

0-10V (12%-100%)

CCT

30K

35K

40K

50W

GRID TYPE

9/16" FLAT (F)

9/16" SLOT (S)

9/16" INTERLUDE (I)

15/16" FLAT (U)

OPTIONAL ACCESSORIES

EMERGENCY

CCEA

24VDC

PENDANT ACCESSORY

FOR DRY CEILINGS (Dry)

FOR DROP CEILINGS (Drop)



CPS LED LIGHTING


843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING


Dimension

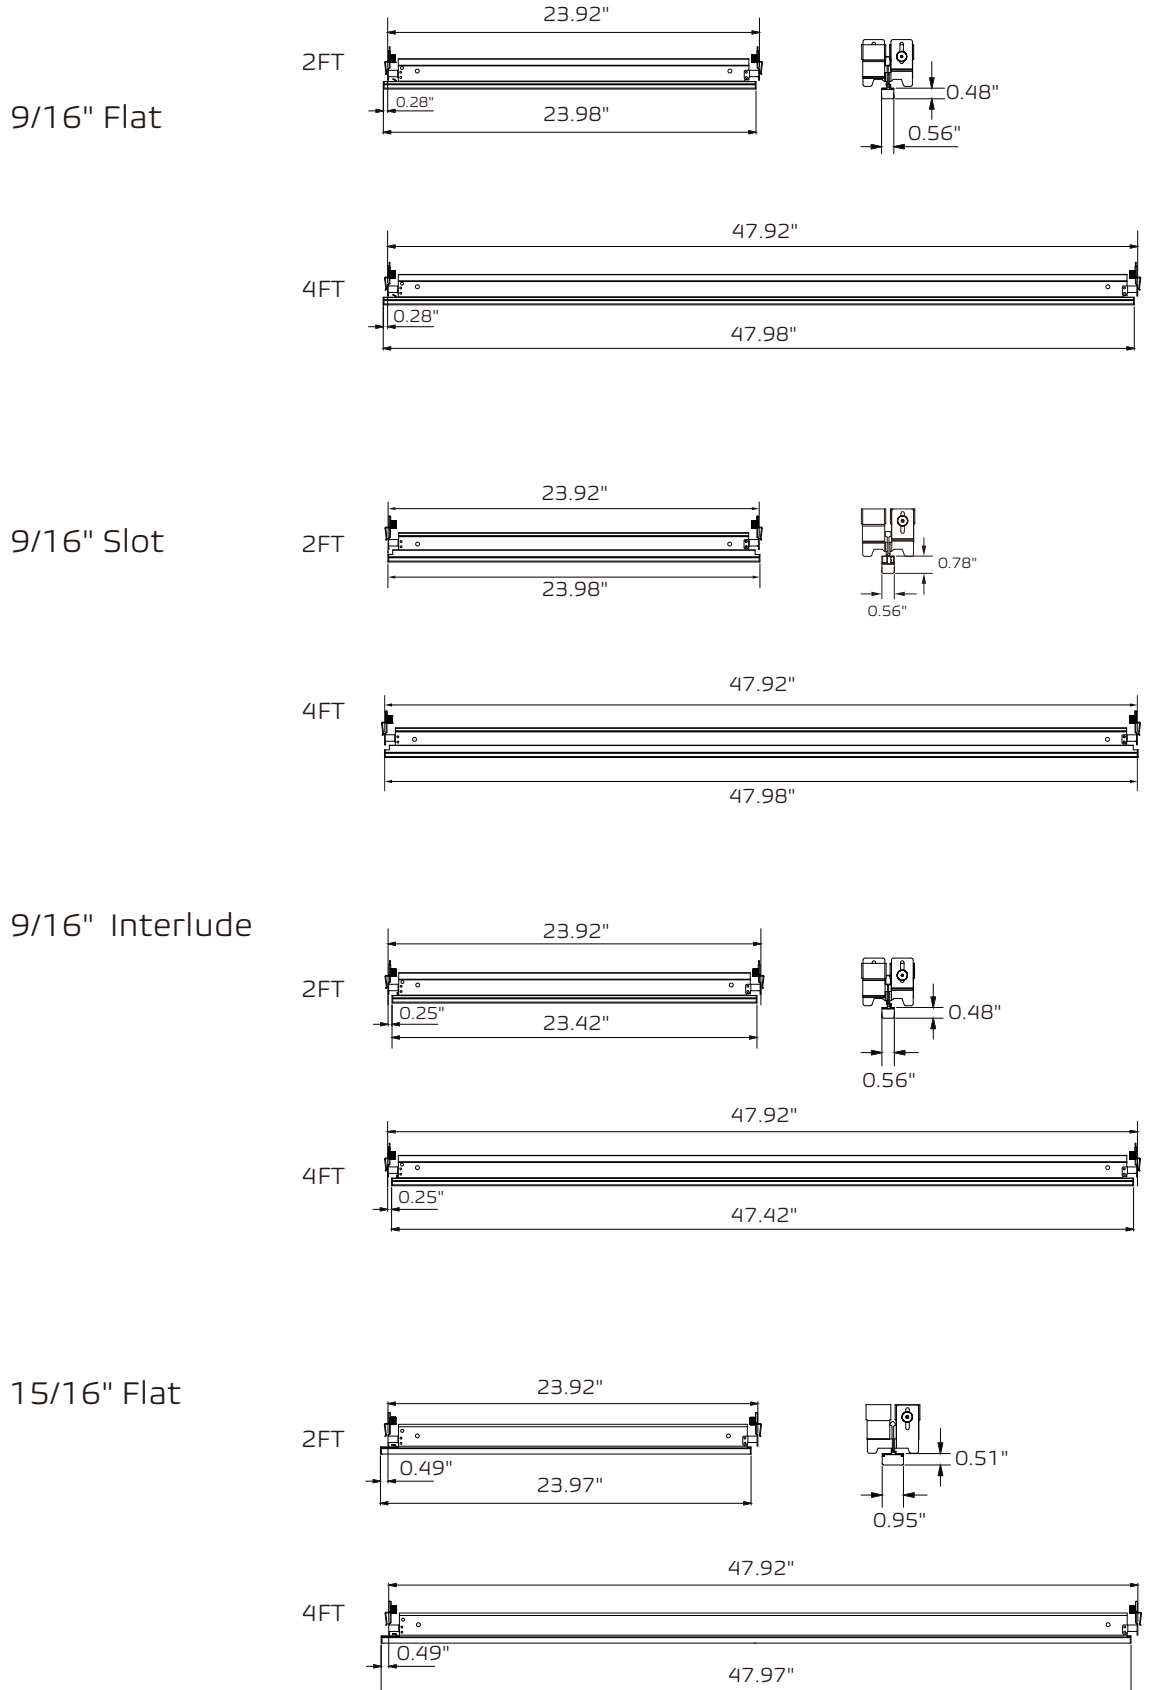


CPS LED LIGHTING
843-407-6803
SALES@CPSLED.COM
WWW.CPSLED.COM

CPS LED LIGHTING

Photometric 9/16" Flat

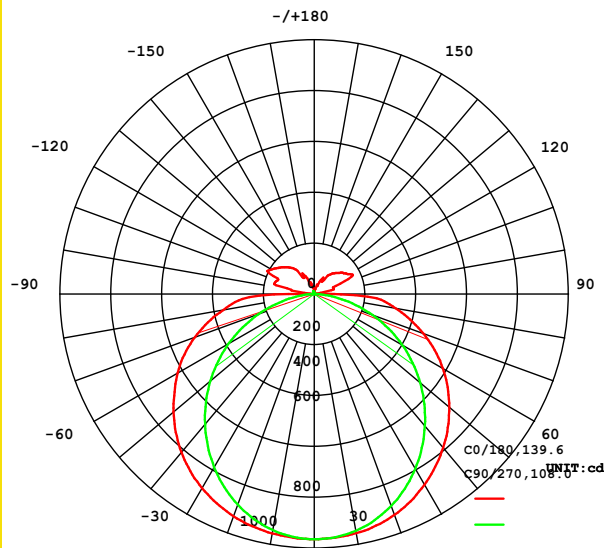


AVERAGE BEAM ANGLE (50%): 123.8 DEG
AVERAGE BEAM ANGLE (50%): 123.8 DEG

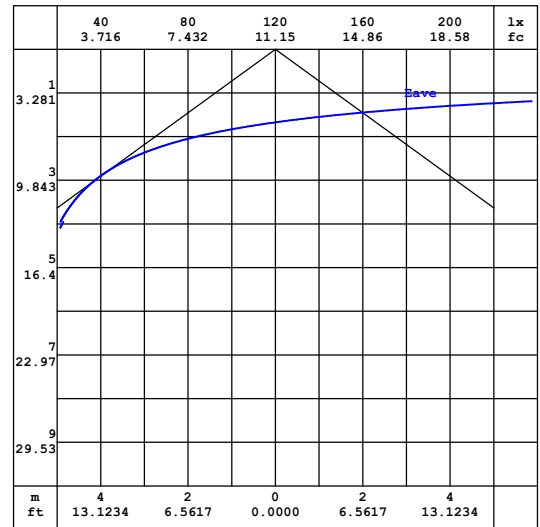


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Average Illuminance Curve

9/16" Slot

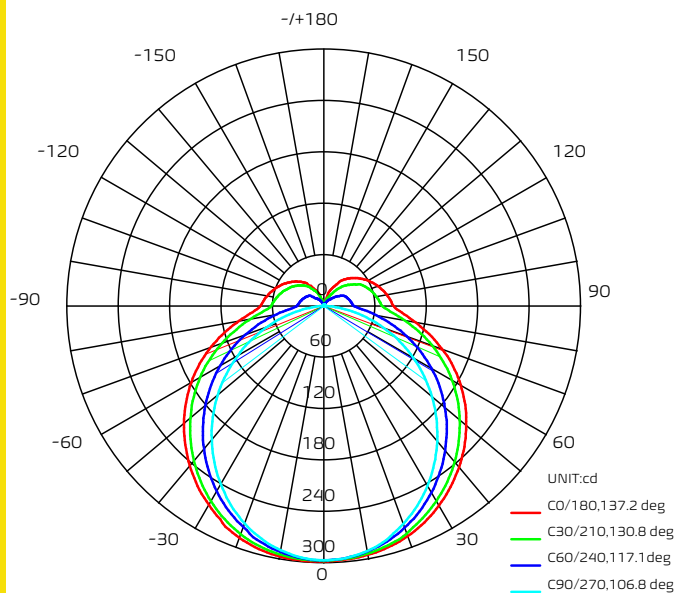

AVERAGE BEAM ANGLE (50%): 128.0 DEG

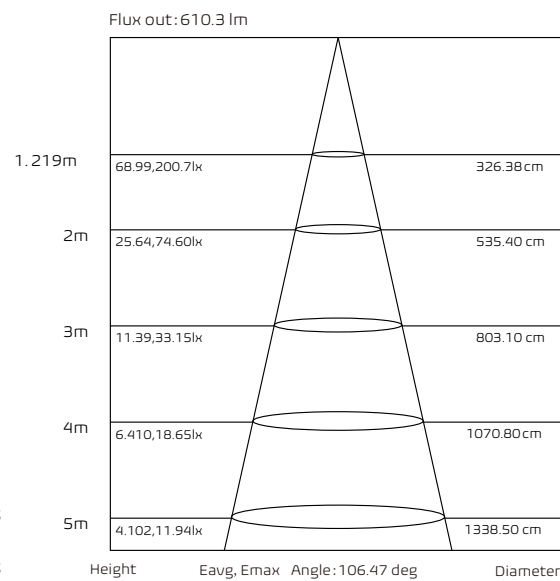

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



CPS LED LIGHTING



843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING

15/16" Slot

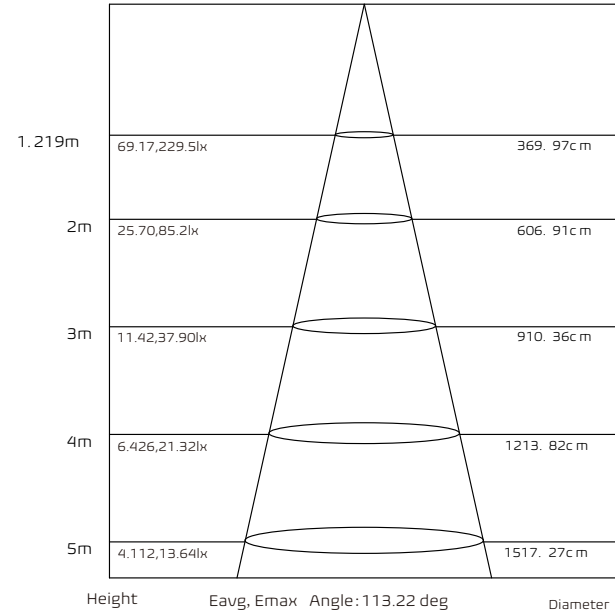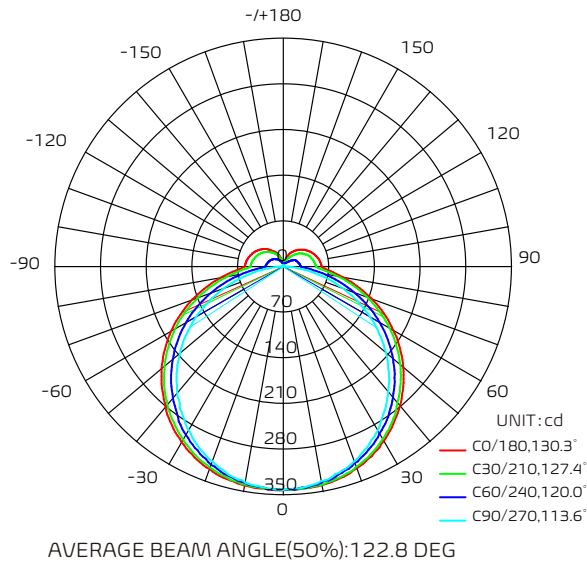

Mounting

9/16" Flat



Suprafine® XL

9/16" Slot




Silhouette® 1/4" XL




Silhouette® 1/8" XL

9/16" Interlude




Interlude® XL




Sonata® XL

15/16" Flat



Prelude® XL



Clean Room



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM