



# TUNABLE TROFFER RETROFIT KIT

## PRODUCT FEATURES

- retrofits existing 2'X2'/2'X4' fluorescent troffers or louvers to led in approximately one minute
- industry's first led troffer retrofit completely assembled within the frame
- tunable wattage and color temperature




### APPLICATIONS

- OFFICES
- HALLWAYS
- MULTIPURPOSE ROOMS
- CONFERENCE ROOMS

## DIMENSIONS: MM

	LENGTH	WIDTH	DEPTH	WEIGHT kg
CPS-TTRK-2X2-XXW-UL-XX	605	606	78.4	3.73
CPS-TTRK-2X4-XXW-UL-XX	1215	606	78.4	6.16

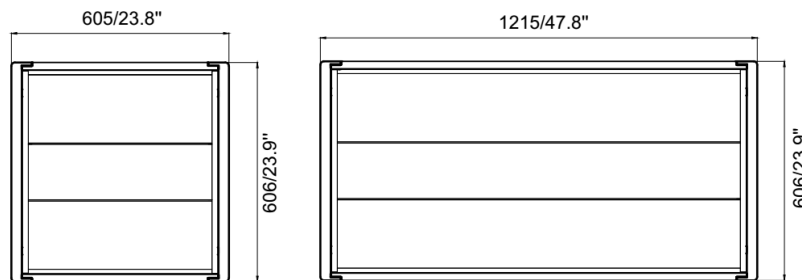



# TUNABLE TROFFER RETROFIT KIT

## ORDER INFORMATION

SERIES	LENGTH (FT)	WATTAGE (XXW)		VOLTAGE UL = 100-277V	COLOR TEMP (CCT) XX=3500K, 4000K, 5000K	
		2X2-22W/28W/35W	2X4-28W/35W/45W		XX	XX
CPS-TTRK-	2X2-	XXW-		UL	XX	
	2X4-	XXW-			XX	
EXAMPLE: CPS-TTRK-2X4-XXW-UL-XX						
DLC Model# CPS-TTRK-2X4-28/35/45W-UL-83550						

## SPECIFICATIONS

UL 1598 SUITABLE FOR DAMP LOCATIONS, TYPE IC
0-10V DIMMING IS CONTINUOUS
LUMENS: 125-127 LM/W
MATERIAL: PLASTIC+PC
MOUNTING: SURFACE, RECESSED
WARRANTY: 7 YEARS
INPUT VOLTAGE: AC 100V-277V, 50/60 Hz
COLOR TEMPERATURE: 3500K-5000K
TEMPERATURE RATING: -20°C~+50°C
L70 LIFE PROJECTED 100,000 HOURS