


CPS LED LIGHTING

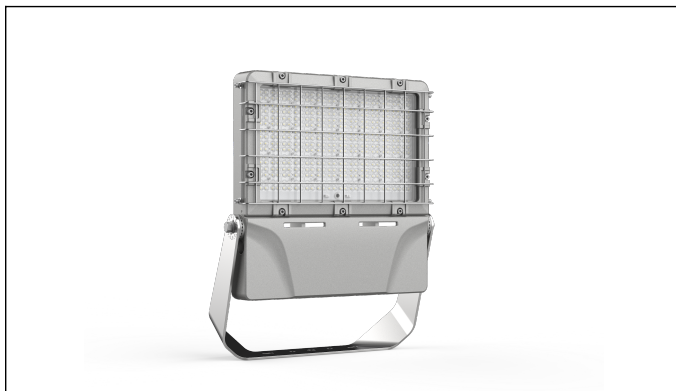

PRODUCT NAME : Explosion Proof Flood

PRODUCT SKU EXAMPLE: CPS-HA04-150W-UL-5000K

PRODUCT DESCRIPTION

A certified Luminaire For Use In Hazardous Locations and makes it ideal solutions for a wide range of harsh and hazardous applications. Three wattages: 150W, 200W, 240W, efficiency up to 150lm/w, lumen packages from 22500lm to 36000lm. Warm white-cool white color(2000K-6500K) and colored LED R/G/B/AMBER optional. The explosion proof line is **MADE TO ORDER.**

APPLICATIONS

Power plants, Heavy industrials storage facility, Paper mills wastewater treatment, Plants loading docks, Shipyards, Chemical processing facility, Petrochemical processing facility.

OTHER INFO

The body adopts special design, avoid water being accumulated, easy clean and well heat performance.

Class I, Div. 2, GR. A, B, C, D
Class II, Div. 1, GR. E, F, G
Class II, Div. 2, GR. F, G
CIII


Type NEMA 4X
Suitable for Wet Locations Non-recessed
Marine Luminaire Outside Type
IP66

ORDERING INFORMATION


SERIES	WATTAGE	VOLTAGE	CCT
CPS-HA04-	150W	UL=120-277V, UH=277-480V	3000,4000K,5000K
CPS-HA04-	200W	UL=120-277V, UH=277-480V	3000,4000K,5000K
CPS-HA04-	240W	UL=120-277V, UH=277-480V	3000,4000K,5000K

SPECIFICATIONS


LM/W: 150
WARRANTY: 5 YEARS
POWER FACTOR: >0.90
SURGE PROTECTION: 10kV line-line, 10kV linear-earth
L70: 100,000 HOURS
VOLTAGE: 100-277V & 277-480V
DRIVER TYPE: CONSTANT CURRENT (CC)
POWER TYPE: 0.95
IP66 / IK08 RATED
BRACKET MOUNTING




F01601




F01602




F01603




F01604




F01605




F01606




F01608




F01609




F01610



F01611



F01612




F01613



Wire Guard

Wire guard 432*233*36mm
Surface treatment: Nickel plating
Color: Nickel color

Code: BC-HA04-01



Glare Shield

Glare shield 425*152*150mm
Surface treatment: Spraying outdoor powder
Color: Silver gray

Code: BC-HA04-02

