


CPS LED LIGHTING

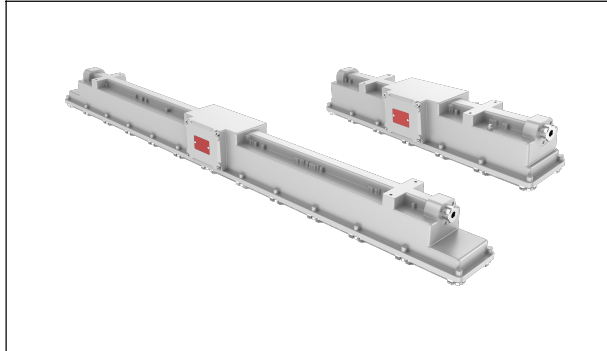

PRODUCT NAME : Explosion Proof Linear

PRODUCT SKU EXAMPLE: CPS-HA06-100W-UL-5000K

PRODUCT DESCRIPTION

The Explosion Proof Linear is a certified LED Luminaire for Hazardous Locations with waterproof, dustproof, anti-corrosion and shock resistance, well combination of robust structure and outstanding appearance. It's an ideal solution for all types of harsh and hazardous applications. The explosion proof line is MADE TO ORDER.

APPLICATIONS

Chemical, Oil, gas and petrochemical, Pulp and paper, Foundries, Manufacturing, Waste and sewage treatment, Power generation, Paint spray booths.

OTHER INFO

Various installation methods such as ceiling mount, trunnion mount, hoop mount, loop mount and pendant mount, are available to meet different installation demands

Class I, Division 2, Groups A, B, C, D
Class II, Division 2, Groups F, G
Class III
Simultaneous Presence Suitable for Use Wet
Locations Suitable for Marine locations
Emergency Battery Back-up
Type 4X

ORDERING INFORMATION

SERIES	WATTAGE	VOLTAGE	CCT
CPS-HA06-	30W-	UL=120-277V, UH=277-480V	3000,4000K,5000K
CPS-HA06-	40W-	UL=120-277V, UH=277-480V	3000,4000K,5000K
CPS-HA06-	50W-	UL=120-277V, UH=277-480V	3000,4000K,5000K
CPS-HA06-	60W-	UL=120-277V, UH=277-480V	3000,4000K,5000K
CPS-HA06-	70W-	UL=120-277V, UH=277-480V	3000,4000K,5000K
CPS-HA06-	80W-	UL=100-277V, UH=277-480V	3000,4000K,5000K
CPS-HA06-	100W-	UL=100-277V, UH=277-480V	3000,4000K,5000K

SPECIFICATIONS

LM/W: 150
WARRANTY: 5 YEARS
POWER FACTOR: >0.90
OPERATING TEMPERATURE: 40°C to + 55°C (-40°F to +131°F) (Only 30W/40W/60W/70W/80W) -40°C to + 45°C (-40°F to +113°F) (Only 50W) -40°C to + 40°C (-40°F to +104°F) (Only 100W)
L70: 100,000 HOURS
VOLTAGE: 100-277V & 277-480V
DIMMING: 1-10V (30W,40W,50W 100-277V ONLY)
POWER TYPE: 0.95
IP66 / IK08 RATED



Ceiling Mount

Dimension: 150*30*100mm
Surface Treatment: Powder coating
Color: Grey (RAL9007)


Code: BC-HA06-01



Trunnion Mount

Dimension: 86*43*100mm
Surface Treatment: Powder coating
Color: Grey (RAL9007)

Code: BC-HA06-02



Hoop Mount

Dimension: 119*25*122mm
Surface Treatment: Powder coating
Color: Grey (RAL9007)

Code: BC-HA06-03



Loop Mount

Dimension: 119*25*115mm
Surface Treatment: Powder coating
Color: Grey (RAL9007)

Code: BC-HA06-04



Pendant Mount

Dimension: Ø33*65mm
Surface Treatment: Surface passivation
Color: Stainless steel color
Tube specification: M25X1.5 or 3/4"NPT
Cable outer diameter: 8-12

Code: BC-HA06-05



Pendant Mount

Dimension: Ø41*65mm
Surface Treatment: Surface passivation
Color: Stainless steel color
Tube specification: M32X1.5 or 1"NPT
Cable outer diameter: 15-19

Code: BC-HA06-06