

CPS LED LIGHTING



PRODUCT NAME : COMPACT TUNABLE TROFFER RETROFIT KIT
PRODUCT SKU : CPS-CTRK-24-34/38/45W-UL-3550

PRODUCT DESCRIPTION

This product retrofits 2x2 / 2x4 fluorescent troffers to LED in approximately one minute. This retrofit kit is completely assembled within the frame. DLC listed, UL 1598 suitable for damp locations, and UL 8750 LED equipment lighting products.

APPLICATIONS

Offices, Hallways, Conference rooms, Multipurpose rooms.


ORDERING INFORMATION				
SERIES	SIZE	WATTAGE	VOLTAGE	CCT
CPS-CTRK-	24-	34/38/45W-	UL-	3550

INSTALLATION & RATINGS: (YES OR NO)

IP20
DLC: YES
UL: YES
ETL: NO
NSF: NO

SPECIFICATIONS
LM/W: 125
WARRANTY: 7
DIMMING: 0-10V CONTINUOUS, DIMS TO 10%
TEMPERATURE RATED: (-20°C to +50°C)(-4°F to 122°F)
LENS: FROSTED LENS
VOLTAGE: 120-277V
CRI: Ra > 80
CCT: 3500K-5000K TUNABLE
2X4 = 1220MM*608MM*78MM

OTHER INFO

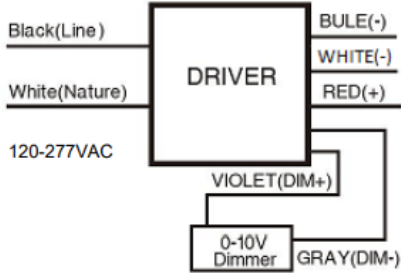

Item No.	Luminous	Input Power	Efficacy	Input Voltage
CPS-CTRK-24-34/38/45W-UL-3550	5625	45	125	120-277
CPS-CTRK-24-34/38/45W-UL-3550	5670	45	126	120-277
CPS-CTRK-24-34/38/45W-UL-3550	5715	45	127	120-277
CPS-CTRK-24-34/38/45W-UL-3550	4864	38	128	120-277
CPS-CTRK-24-34/38/45W-UL-3550	4902	38	129	120-277
CPS-CTRK-24-34/38/45W-UL-3550	4940	38	130	120-277
CPS-CTRK-24-34/38/45W-UL-3550	4454	34	131	120-277
CPS-CTRK-24-34/38/45W-UL-3550	4488	34	132	120-277
CPS-CTRK-24-34/38/45W-UL-3550	4522	34	133	120-277