


CPS LED LIGHTING

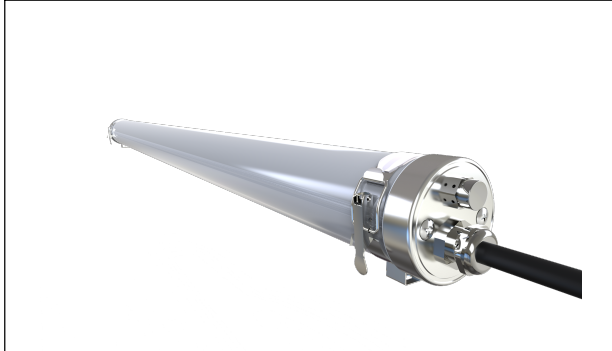

PRODUCT NAME : WASHDOWN STRIP

PRODUCT SKU EX: CPS-WDS-4-50W-UL-50K

PRODUCT DESCRIPTION

NSF Rated washdown strip. Works well in food processing facilities or any application that has to be sprayed clean. Indoor and Outdoor applications.

APPLICATIONS

Food processing plant, Car wash, Boiler room,
 Indoor applications, Outdoor applications.

ORDERING INFORMATION

SERIES	LENGTH	WATTAGE	VOLTAGE	CCT
CPS-WDS-	2-	20W-	UL-	3000K, 4000K 5000K, 6000K
CPS-WDS-	2-	30W-	UL-	3000K, 4000K 5000K, 6000K
CPS-WDS-	4-	36W-	UL-	3000K, 4000K 5000K, 6000K
CPS-WDS-	5-	45W-	UL-	3000K, 4000K 5000K, 6000K
CPS-WDS-	4/5-	50W-	UL-	3000K, 4000K 5000K, 6000K
CPS-WDS-	5-	60W-	UL-	3000K, 4000K 5000K, 6000K

CERTIFICATIONS & RATINGS

IP65
DLC: no
UL: no
ETL: no
NSF: yes
CPS RECOMMENDATIONS:
EMB: available
CONTROL: available
SENSOR: available



SPECIFICATIONS

IP69K Waterproof, IK10 Protection, 94V0 materials
Warranty: 5 years
CRI: >80
Temperature Rated: -20~ +40°C
High efficacy 120-160 lm/w
Voltage: UL = 120-277V, 50/60Hz
PC material: UV resistance / PMMA material: Corrosion resistance / Cover: Frosted or Transparent
CCT: 3000K, 4000K, 5000K OR 6000K
L70: 100,000 hours
DC Output: 30-40V
Power Factor: >0.95


Power(W)	Lumens	Working Current
20W	2400-2600 LM	450 mA
30W	3600-3900 LM	700 mA
36W	4300-4700 LM	850 mA
45W	5400-5900 LM	1100 mA
50W	6000-6500 LM	1200 mA
60W	7200-7800 LM	1400 mA

DIMENSIONS & PHOTOMETRICS


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

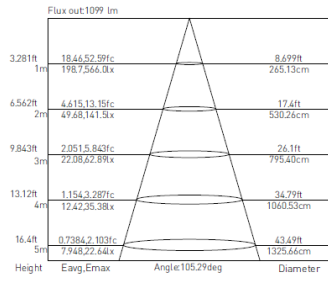


2-20W-X

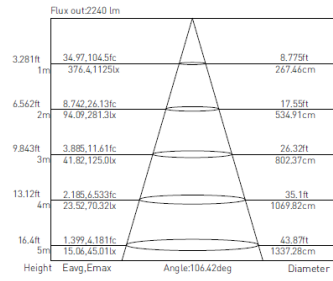


4-36W-X

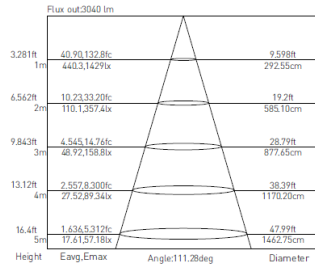


5-45W-X

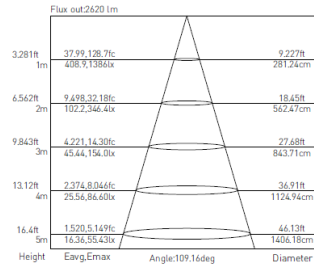


2-30W-X

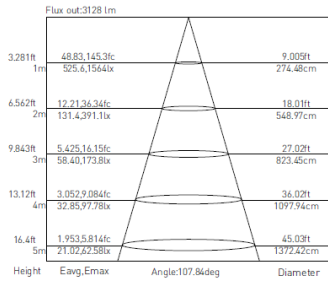


4-50W-X / 5-50W-X

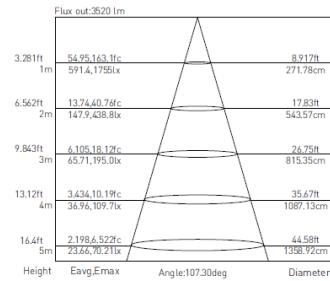

5-60W-X





Standard

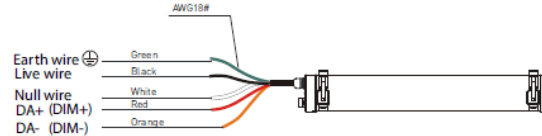


DALI & 0/1-10V Dimmable


Power (W)	Input Voltage (V)	Max qty connecting in series	Input Voltage (V)	Max Qty connecting in series
20W	110	16 PCS	277	41 PCS
30W	110	11 PCS	277	27 PCS
36W	110	10 PCS	277	26 PCS
45W	110	7 PCS	277	18 PCS
50W	110	6 PCS	277	16 PCS
60W	110	5 PCS	277	13 PCS



EMERGENCY SERIES

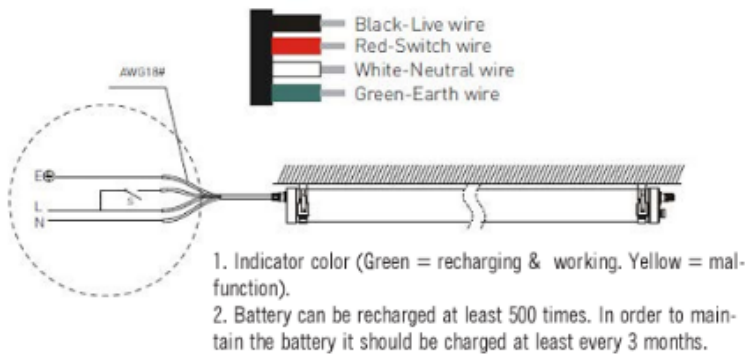

DIMENSIONS

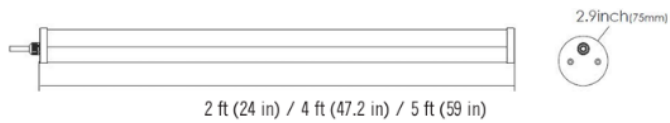

Packaging

Length	Carton Size	N.W. (CTN)	G.W. (CTN)
2 FT (24 IN)	29.53*9.84*7.09 IN	16.53 LB	18.74 LB
4FT (47.2 IN)	53.15*9.84*7.09 IN	25.35 LB	25.35 LB
5 FT (59 IN)	64.96*9.84*7.09 IN	31.97 LB	31.97 LB

CAUTION: 1. DO NOT use in areas or applications with a large quantity of chemical corrosive substances. ex: chemical plant, stock yard. 2. The applicable operating temperature is -20~+40 degrees. Sharp temperature variations may increase lamp damage. 3. Make sure the application is completely grounded and connected.