

CPS LED LIGHTING



PRODUCT NAME : Mini Wall Pack
PRODUCT SKU : CPS-MWP-XXX-UL-BL-XX

PRODUCT DESCRIPTION

The LED Mini Wall Pack is an excellent choice for outdoor lighting, with its easy installation and operation, as well as an IP65 waterproof rating.

APPLICATIONS
Entrance Lighting Courtyard Lighting Outdoor Landscape Industrial Lighting Hotel Lighting Wall Lighting

ORDERING INFORMATION				
SERIES	SIZE	WATTAGE	VOLTAGE	CCT
CPS-MWP	13W-	UL-	BL-	40
CPS-MWP	20W-	UL-	BL-	50

CERTIFICATIONS & RATINGS
IP65
DLC: no
UL: yes
ETL: no
NSF: no
CPS RECOMMENDATIONS:
EMB: available
CONTROL: available
SENSOR: available



SPECIFICATIONS
13W/20W
UL, CUL, DLC5 Certificate
IP65 internal driver, input voltage 100-277V
No UV or IR in the beam
Easy to install and operate:
Long lifespan
Light is soft and uniform, safe to eyes
Instant start, no flickering, no humming
Green and eco-friendly, without mercury

DIMENSIONS & PHOTOMETRICS

Photometric:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 86.48 lm/W			
MODEL		I _{max} (cd)	458.2	S/MH (C0/180)	1.17
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1137.8	η UP, DN (C0-180)	0.0, 44.7
NOMINAL FLUX (lm)	1137.81	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 55.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

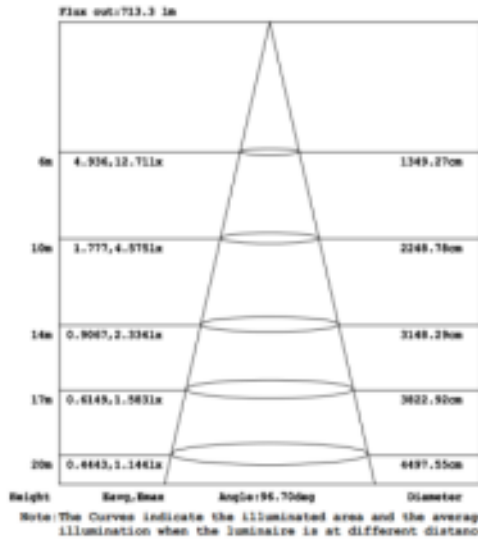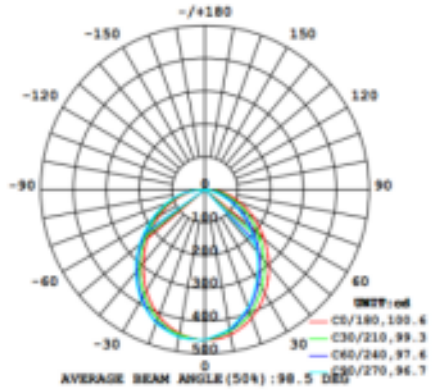

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 86.49 lm/W
MODEL		I _{max} (cd)	649.8	S/MI (C0/180)	1.18	
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MI (C90/270)	1.23	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1628.7	η UP, DN (C0-180)	0.0, 46.5	
NOMINAL FLUX (lm)	1628.67	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 53.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

