

CPS LED LIGHTING



PRODUCT NAME : Standard Flood Light
PRODUCT SKU EX: CPS-SFL-150W-UL-BL-50K

PRODUCT DESCRIPTION

The standard flood light series from CPS offers a 150W and 300W product with a 140-146 LM/W package. UL & DLC certified.

APPLICATIONS

Outdoor sports courts
 Stadiums
 Warehouses
 Factories
 Workshops
 Gymnasiums
 Supermarkets

ORDERING INFORMATION

SERIES	WATTAGE	VOLTAGE	HOUSING COLOR	CCT
CPS-SFL	150W-	UL-	BL/D-	40K/50K
CPS-SFL	150W-	UH-	BL/D-	40K/50K
CPS-SFL	300W-	UL-	BL/D-	40K/50K
CPS-SFL	300W-	UH-	BL/D-	40K/50K

CERTIFICATIONS & RATINGS

IP65
DLC: YES
UL: YES
ETL: NO
NSF: NO

CPS RECOMMENDATIONS:


EMB: available
CONTROL: available
SENSOR: available

SPECIFICATIONS


150W: 140 LM/W 300W: 146 LM/W
Universal 120-277Vac or 347-480Vac input :
Standard with 1-10 dimming drivers:
Power factor: >90%
THD: <20%
L70 life: projected 100,000 hours
Ambient operating temperature: -40°C to 45°C (-40°F to 133°F):
Mounting options: Slipfitter, Trunnion, Yoke, and Wall Mount
Warranty: 5 years
Color temperature: 4000K or 5000K

DIMENSIONS & PHOTOMETRICS


PHOTOMETRICS

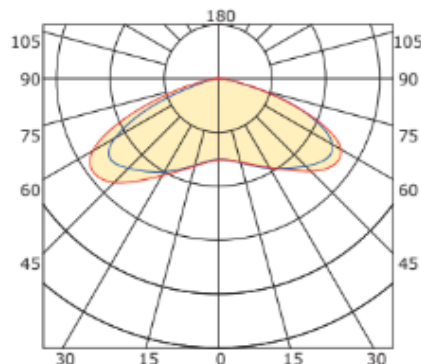


150W/200W (Slipfitter Mount)




150W/200W (Yoke Mount)




150W/200W (Wall Mount)

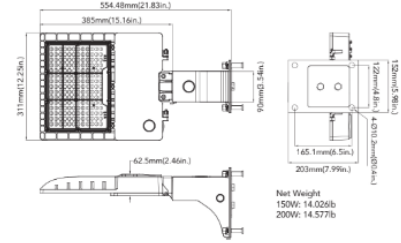

250W/300W (Slipfitter Mount)

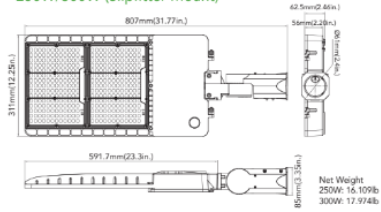

250W/300W (Yoke Mount)

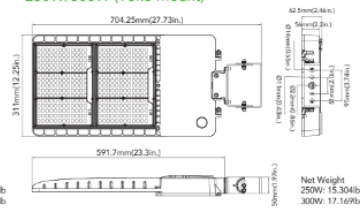

250W/300W (Wall Mount)

