

# CPS LED LIGHTING



**PRODUCT NAME :** Tunable Vaportight  
**PRODUCT SKU EX:** CPS-TVT-4-34/38/45W-UL-3550

### PRODUCT DESCRIPTION

The tunable vapor tight fixture is built to withstand higher humidities, with a rating of UL 1598, and an impact resistant polycarbonate lens. With consistent, bright lighting and an easy installation, it makes a great cost effective means of illumination.

APPLICATIONS
Offices, Hallways, Multipurpose rooms, Conference rooms.


ORDERING INFORMATION				
SERIES	SIZE	WATTAGE	VOLTAGE	CCT
CPS-TVT-	4-	34/38/45W-	UL-	3550
CPS-TVT-	8-	38/46/54W-	UL-	3550
UL= 120-277V / UH= 277-480V				

CERTIFICATIONS & RATINGS
IP65
DLC: yes
UL: yes
ETL: no
NSF: yes
CPS RECOMMENDATIONS:
EMB: available
CONTROL: available
SENSOR: available

SPECIFICATIONS
LM/W: 125-127
Warranty: 7 years
Dimming: 0-10V continuous
Temperature Rated: -40 F~122 F
Lens: frosted
Voltage: UL = 120-277V, UH=277-480V
L70 Life projected: 100,000 hours
CCT: 3500K-5000K
Mounting: surface, V hook ready

**DIMENSIONS & PHOTOMETRICS**

PHOTOMETRIC TEST LIST				
PART #	LUMENS-RATED	WATTS-RATED	EFFICACY-RATED	CCT RANGE
CPS-TVT-4-34/38/45W-UL-3550	5850	45	130	35-50
	5895	45	131	35-50
	5940	45	132	35-50
	4940	38	130	35-50
	4978	38	131	35-50
	5016	38	132	35-50
	4420	34	130	35-50
	4454	34	131	35-50
	4488	34	132	35-50
CPS-TVT-8-38/46/54W-UL-3550	7020	54	130	35-50
	7074	54	131	35-50
	7128	54	132	35-50
	5980	46	130	35-50
	6026	46	131	35-50
	6072	46	132	35-50
	4940	38	130	35-50
	4978	38	131	35-50
	5016	38	132	35-50

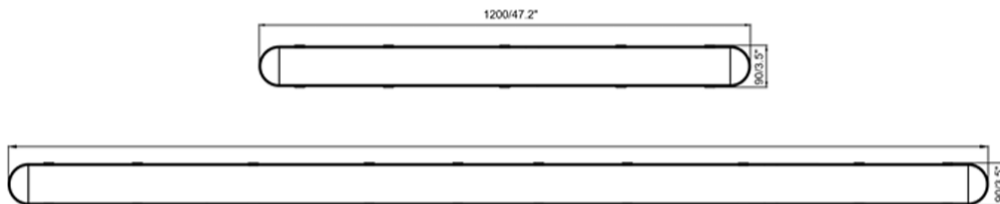

DIMENSIONS				
	LENGTH (Inches)	WIDTH (Inches)	DEPTH (Inches)	WEIGHT (lbs)
CPS-TVT-4-34W/38W/45W-UL-3550	47.2	3.54	3.14	4.4
CPS-TVT-8-38W/46W/54W-UL-3550	94.4	3.54	3.14	7.7