

# CPS LED LIGHTING

## Applications:

Offices

Hallways

Multipurpose rooms

Conference rooms

Classrooms


Commercial facilities

Industrial facilities

Cafeterias

Hospitals

## Tunable Back Lit Panel

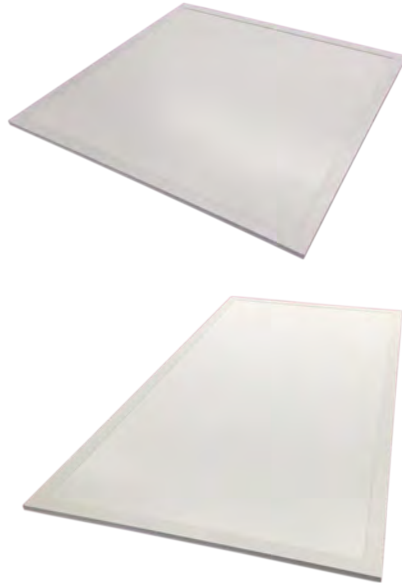

The BLT Series features the latest optical and LED technology. This panel will fill the space giving a larger, brighter, and more productive ambiance. The BLT series is tunable in wattage and color temperature.

The BLT comes in two lengths, 2x2 and 2x4.

### ORDER INFORMATION

SERIES	LENGTH (FT)	WATTAGE (W)	VOLTAGE UL = 100-277V	COLOR TEMP (CCT)
CPS-BLT-	22-	25/30/40W-	UL-	3550
		(TUNABLE)		(TUNABLE)
CPS-BLT-	24-	30/40/50W-	UL-	3550
		(TUNABLE)		(TUNABLE)
<b>EXAMPLE: CPS-BLT-22-25/30/40W-UL-3550</b>				
DLC Model# CPS-BLT-22-25/30/40W-UL-3550				

### SPECIFICATIONS

UL 1598 suitable for damp locations, type IC

UL 8750 LED equipment in lighting products

0-10V dimming is continuous

Material: plastic + PC

Mounting: surface, recessed

Warranty: 7 years

Input voltage: 100V-277V

Color temperature: 3500K-5000K

Temperature rating: -20°C to +45°C (-4°F to 113°F)

L70 life projected: 100,000 hours

Lens: frosted



**CPS LED LIGHTING**

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM


# CPS LED LIGHTING

## PHOTOMETRIC TEST LIST

PART NUMBER	LUMENS-RATED	WATTS-RATED	EFFICACY-RATED	CCT RANGE
CPS-BLT-22- 25/30/40W-UL-3550	4400	40	110	35-50
	4440	40	111	35-50
	4480	40	112	35-50
	3390	30	113	35-50
	3420	30	114	35-50
	3450	30	115	35-50
	2900	25	116	35-50
	2925	25	117	35-50
	2950	25	118	35-50
CPS-BLT-24- 30/40/50W-UL-3550	5500	50	110	35-50
	5550	50	111	35-50
	5600	50	112	35-50
	4520	40	113	35-50
	4560	40	114	35-50
	4600	40	115	35-50
	3480	30	116	35-50
	3510	30	117	35-50
	3540	30	118	35-50

## DIMENSIONS

	LENGTH	WIDTH	DEPTH	WEIGHT (KG)
CPS-BLT-22	603 MM (23.7")	603 MM (23.7")	41 (1.6")	2.62
CPS-BLT-24	1213 MM (47.8")	603 MM (23.7")	41 (1.6")	4.18

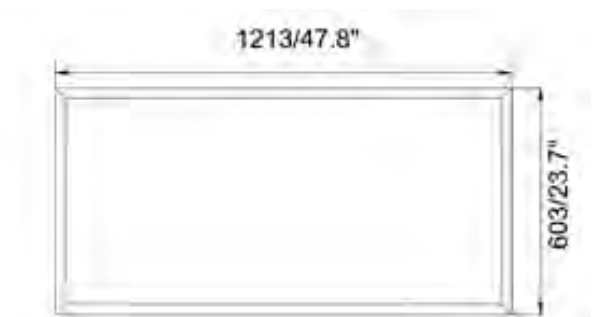

**CPS LED LIGHTING**

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM