



Lumen smart series

advantages

- Good heat dissipation and excellent driver
- High quality and competitive price
- Energy saving up to 80% high intensity
- Minimum maintenance costs
- No modification, no need to rewire
- No RF interference, no flickering or buzzing
- Solid State, high shock/vibration resistant




Lumen Smart Double Twins

Dual Light Sources Design
 High Power, High Lumen
 Wide Beam Angle Light
 Operating Temp -20°C ~+45°C
 120-277V
 >50,000h@L70
 IP40



7 YEAR WARRANTY

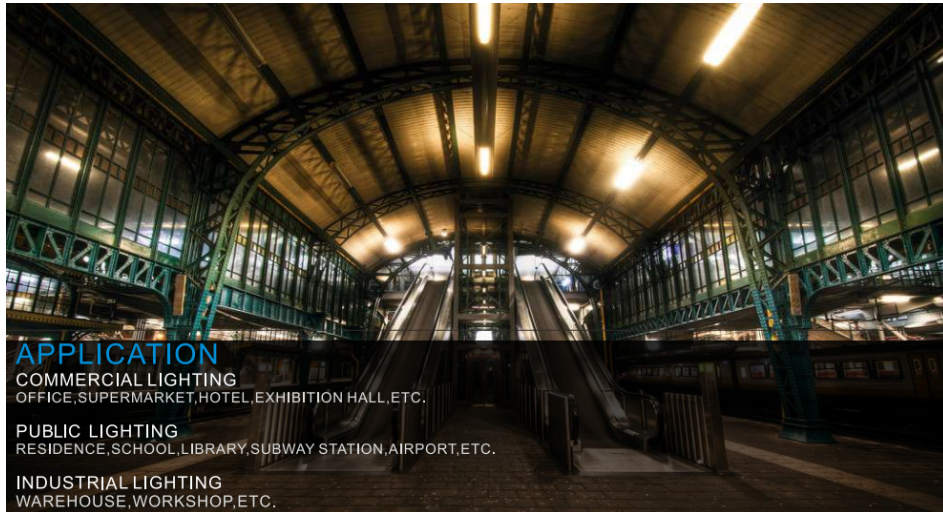

APPLICATION

COMMERCIAL LIGHTING
 OFFICE, SUPERMARKET, HOTEL, EXHIBITION HALL, ETC.


PUBLIC LIGHTING
 RESIDENCE, SCHOOL, LIBRARY, SUBWAY STATION, AIRPORT, ETC.

INDUSTRIAL LIGHTING
 WAREHOUSE, WORKSHOP, ETC.

PERFORMANCE INFORMATION

PART NO.	LUMENS FROSTED-CLEAR	LUMEN EFFICIENCY	PF	CRI	BEAM ANGLE
CPS-LS-DTW-1-8W	800-880	100-115 LM/W	>0.9	>80	120°
CPS-LS-DTW-2-15W	1500-1650	100-115 LM/W	>0.9	>80	120°
CPS-LS-DTW-3-25W	2500-2750	100-115 LM/W	>0.9	>80	120°
CPS-LS-DTW-4-30W	3000-3300	100-115 LM/W	>0.9	>80	120°
CPS-LS-DTW-5-40W	4000-4400	100-115 LM/W	>0.9	>80	120°
CPS-LS-DTW-6-44W	4400-4840	100-115 LM/W	>0.9	>80	120°
CPS-LS-DTW-8-60W	6000-6600	100-115 LM/W	>0.9	>80	120°

CCT RANGE: 4000-5000K

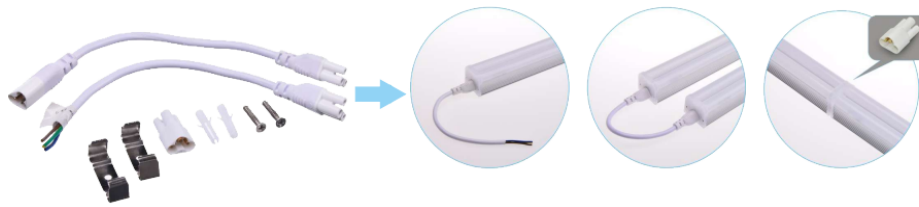

Linkable 3-Pin Lead In Wire
Socket/Power Plug


ORDER INFORMATION

SERIES	LENGTH (FT)	WATTAGE	VOLTAGE UL = 110-277V	LENS C=CLEAR F=FROSTED	KELVIN 50 = 5000K
CPS-LS-DTW	1	8W	UL	C	40
	2	15W		F	50
	3	25W			
	4	30W			
	5	40W			
	6	44W			
	8	60W			

EXAMPLE: CPS-LS-DTW-8-60W-UL-F-50

CLEAR LENS SPECIAL ORDER

LIGHT DISTRIBUTION

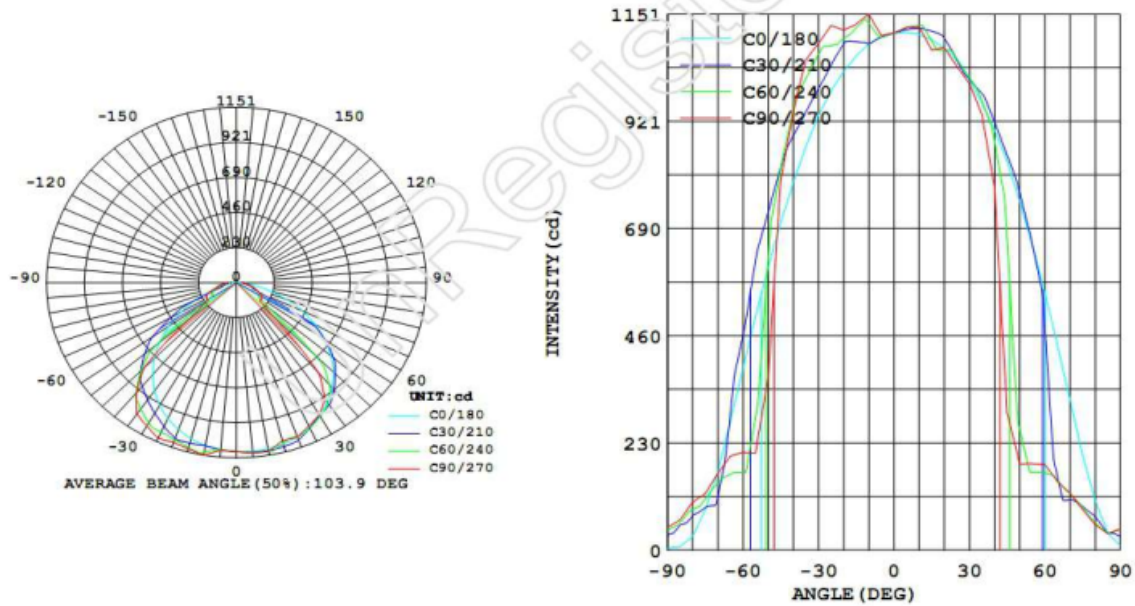

DIMENSIONS

PART NO.	SIZE A (MM)	SIZE B (MM)	SIZE C (MM)
CPS-LS-DTW-1-8W	297	36	41
CPS-LS-DTW-2-15W	566	36	41
CPS-LS-DTW-3-25W	870	36	41
CPS-LS-DTW-4-30W	1166	36	41
CPS-LS-DTW-5-40W	1500	36	41
CPS-LS-DTW-6-44W	1800	36	41
CPS-LS-DTW-8-60W	2301	36	41



PACKAGING DETAILS

PART NO.	PRODUCT SIZE (MM)	CARTON SIZE (MM)	QUANTITY/ CARTON (PCS)	N.W./ CARTON (KG)	G.W./ CARTON (KG)
CPS-LS-DTW-1-8W	297*45*36	405*260*180	20	6.1	7.5
CPS-LS-DTW-2-15W	566*45*36	670*260*180	20	8.6	10.7
CPS-LS-DTW-3-25W	870*45*36	975*260*180	20	13.6	16.5
CPS-LS-DTW-4-30W	1166*45*36	1270*260*180	20	17.2	20.5
CPS-LS-DTW-5-40W	1500*45*36	1605*260*180	16	16.4	19.7
CPS-LS-DTW-6-44W	1800*45*36	1905*260*180	16	19.7	23.5
CPS-LS-DTW-8-60W	2301*45*36	2405*115*220	9	15.2	18.5

Packing with white box

