

SPECIFICATIONS

- Fast and easy installation to replace existing led highbay and 300W HID highbay
- Up to 50% energy saving compared to HID highbay
- Lower maintenance cost thanks to over 3 times longer lifetime

FEATURES

- Up to 130 lm/w
- High CRI >80
- Meanwell HLG driver, UL SAA CE RoHS certificate, PF>0.9, THD<20
- Flicker free by camera
- Environmentally friendly, No mercury, No UV, No IR
- IP65, indoor and outdoor using
- Energy Efficiency Grade: A++
- 7-year-warranty
- Quick Start instant 100% luminous flux



TECHNICAL CHARACTERISTICS


Watts	160W
Input voltage	110-277V / 200-480V
Frequency range	50/60Hz
CCT	4000K-5000K
Luminous flux	21200lm
CRI	>80
Body	AL6063 anodize/stoving varnish
Cover	PC milky
Certification and standards	DLC UL CE RoHS SAA
Level of protection	IP65

ORDER INFORMATION

SERIES	WATTAGE	VOLTAGE	KELVIN
		UL = 100-277V UH=200-480V	50 = 5000K
CPS-LSHB-	160W-	UH	40
		UL	50

EXAMPLE: CPS-LSHB-160W-UL-50

PHOTOMETRIC

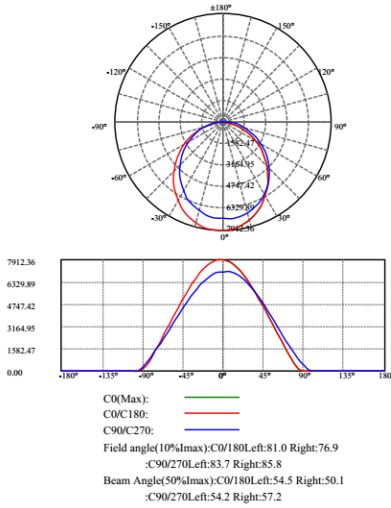

1.0m	7912.4 , 6224.9 lx	260.01cm
2.0m	1978.1 , 1556.2 lx	520.02cm
3.0m	879.2 , 691.7 lx	780.03cm
4.0m	494.5 , 389.1 lx	1040.04cm
6.0m	219.8 , 172.9 lx	1560.06cm
8.0m	123.6 , 97.3 lx	2080.08cm
10.0m	79.1 , 62.2 lx	2600.10cm
12.0m	54.9 , 43.2 lx	3120.12cm

Max , Ave Beam angle of C0plane104.64

DIMENSIONS

LENGTH	WIDTH	DEPTH
1200mm	166mm	77mm

Net weight: 6.7kg

PACKAGING

	LENGTH	WIDTH	DEPTH	QTY PER CARTON
OUTER BOX	1255mm	220mm	215mm	2 PCS

