



200W LUMEN SMART HIGHBAY

SPECIFICATIONS

- Fast and easy installation to replace existing led highbay and 400W HID highbay
- Up to 50% energy saving compared to HID highbay
- Lower maintenance cost thanks to over 3 times longer lifetime

FEATURES

- Up to 130 lm/w
- High CRI >80
- Meanwell HLG driver, UL SAA CE RoHS certificate, PF>0.9, THD<20
- Flicker free by camera
- Environmentally friendly, No mercury, No UV, No IR
- IP65, indoor and outdoor using
- Energy Efficiency Grade: A++
- 7-year-warranty
- Quick Start instant 100% luminous flux

TECHNICAL CHARACTERISTICS

Watts	200W
Input voltage	110-277V / 200-480V
Frequency range	50/60Hz
CCT	4000K-5000K
Luminous flux	26400lm
CRI	>80
Body	AL6063 anodize/stoving varnish
Cover	PC milky
Certification and standards	DLC UL CE RoHS SAA
Level of protection	IP65





ORDER INFORMATION

SERIES	WATTAGE	VOLTAGE		KELVIN
		UL = 100-277V	UH=200-480V	
CPS-LSHB-	200W-	UH	40	
		UL	50	

EXAMPLE: CPS-LSHB-200W-UL-50

PHOTOMETRIC

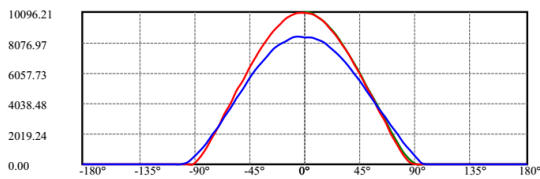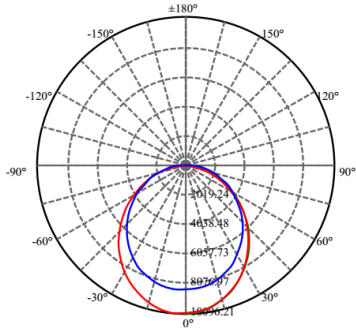

C22.5(Max): —
 C0/C180: —
 C90/C270: —
 Field angle(10%Imax):C0/180Left:80.3 Right:77.0
 :C90/270Left:85.5 Right:85.9
 Beam Angle(50%Imax):C0/180Left:53.9 Right:50.8
 :C90/270Left:56.6 Right:55.5

1.0m	10096.2 , 7704.3 lx	261.46cm
2.0m	2524.1 , 1926.1 lx	522.92cm
3.0m	1121.8 , 856.0 lx	784.37cm
4.0m	631.0 , 481.5 lx	1045.83cm
6.0m	280.5 , 214.0 lx	1568.75cm
8.0m	157.8 , 120.4 lx	2091.67cm
10.0m	101.0 , 77.0 lx	2614.58cm
12.0m	70.1 , 53.5 lx	3137.50cm

Max , Ave Beam angle of C22.5plane105.10

DIMENSIONS

LENGTH WIDTH DEPTH

1500mm 166mm 77mm

Net weight: 7.9kg

PACKAGING

LENGTH WIDTH DEPTH QTY PER CARTON

OUTER BOX 1555mm 220mm 215mm 2 PCS

