



LED T8 BYPASS SERIES

Works without ballast

Bypass Tube Description :

It is 8 foot aluminum LED T8 bypass tube 40w, no glass, non breakable. It can be wired directly with 100-277V AC line voltage
It comes with standard single pin



Bypass Tube Feature :

Installation : Direct Wire

Connection : Two-End-Input

Tube Size : 8 foot (96 inch)

Power : 40 watts

LED Type : 2835

Tube housing : Aluminum

PC Lens : Frosted

Illumination Angle : 180°

Led Driver : Internal

Dimming : non-dimmable

End Caps : FA8 single pin


Lifespan : 50000 hours

Warranty : 5 Years

Certification : UL(E486821)

Bypass Tube Wiring Diagram :

Two-End-Input : directly wire LED Tube into the shunted socket

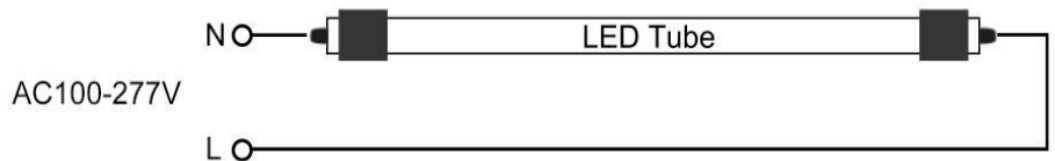

Bypass Tube Specification :

Model	CCT	Size	Watt	Lumen	End Cap	Connection	Input Voltage	PF	CRI
CPS-T8-8-40W-UL-F-40-SP	4000K	8'	40W	4400	FA8	2 End	AC100-277V	≥0.9	≥80
CPS-T8-8-40W-UL-F-50-SP	5000K	8'	40W	4400	FA8	2 End	AC100-277V	≥0.9	≥80