


Panels **Series CPS-PL-**

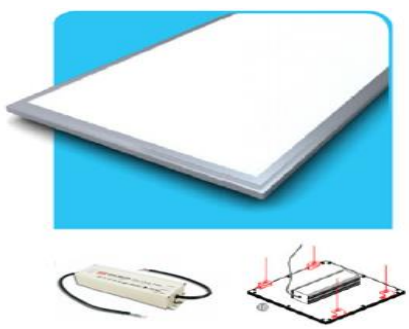

Suitable Applications:
 Commercial
 Municipalities
 Warehouse
 Architectural

Wattage	40W 50W
Length	2X2 2X4
Color Temperature	4000K, 5000K
Input Voltage	AC 110 - 277 V
CRI	80

Ordering Information

Sample Part Number:		CPS-PL-2X2-40W-UL-50	Series CPS-PL-
Lengths*		Wattages / Lumens	Voltage
2X2		40W 4800L	UL 110-277 V
2X4		50W 6000L	
Options			Kelvin Temperatures
EMB	Emergency Battery Backup		40 4000K
			50 5000K

5 YEAR WARRANTY

Part numbers below reflect 40 and 50 watts.

CPS-PL-2X2-40W-UL-40	CPS-PL-2X4-50W-UL-40	CPS-PL-2X2-40W-UL-40-EMB
CPS-PL-2X2-40W-UL-50	CPS-PL-2X4-50W-UL-50	CPS-PL-2X2-40W-UL-50-EMB
		CPS-PL-2X4-50W-UL-50-EMB
		CPS-PL-2X4-50W-UL-50-EMB

DOES NOT EMIT HARMFUL VAPORS OR GASES AND IS SHATTER RESISTANT

				LM 79 LM 80
---	---	---	---	----------------