

CPS LED LIGHTING

Applications:

Shops

Retail spaces

Medical

Industrial

Commercial

Tunable Strip Series



This series is an upgrade to our previous tunable strip light. It provides faster surface mounting or row mounting, luminous part can be easily removed to add emergency backup options or sensors.

Tunable/ Adjustable in power wattage and color temperature.

Ordering Information

SERIES	SIZE	WATTAGE	VOLTAGE	COLOR TEMP
CPS-TSTR-	4-	18/25/30W-	UL-	3550
CPS-TSTR-	8-	65/75/90W-	UL-	3550
EX: CPS-TSTR-4-18/25/30W-UL-3550				

Specifications

LM/W: 130 LM/W
Warranty: 5 years
UL, DLC Listed
Dimming: 0-10V
Temperature Rated: -20°C/-4°F to 50°C /122°F
Lens/Housing: sheet metal stamping
Voltage: 120-277
L70: 100,000 hours
Mounting: surface mount



CPS LED LIGHTING


843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING

Dimensions:

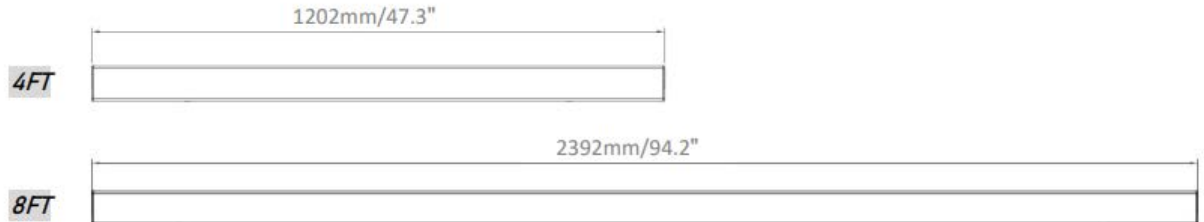

Part #	Luminous	Input Power	Efficacy	Input Voltage
CPS-TSTR-4-18/25/30W-UL-3550	3960	30	132	120-277
	4260	30	142	120-277
	4020	30	134	120-277
	3450	25	138	120-277
	3700	25	148	120-277
	3500	25	140	120-277
	2592	18	144	120-277
	2772	18	154	120-277
	2628	18	146	120-277
CPS-TSTR-8-65/75/90W-UL-3550	11970	90	133	120-277
	12870	90	143	120-277
	12150	90	135	120-277
	10425	75	139	120-277
	11175	75	149	120-277
	10575	75	141	120-277
	9295	65	143	120-277
	9945	65	153	120-277
	9425	65	145	120-277



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM