

CPS LED LIGHTING

Applications:

Industrial

Commercial

High bay applications

Warehouses

Retail spaces

Gymnasiums

Tunable Compact Linear High Bay



The TCL is a tunable wattage and color temperature fixture. Offering a variety of options all in one product with a compact design.

Standalone fixture or plug & play sensors are available. Controls package available.

Ordering Information

SERIES	WATTAGE	VOLTAGE	CCT
CPS-TCL-	78/92/115W-	UL-	3550
CPS-TCL-	135/155/185W-	UL-	3550
CPS-TCL-	200/230/270W-	UL-	3550

Specifications

LM/W: 150
Warranty: 7 years
UL & DLC LISTED
Dimming: 0-10V
Temperature Rated: -20°C / -4°F to 50°C / 122°F
Lens: PMMA optical glare- control lens
Voltage: 120-277 (UL)
CCT: 3000K-5000K tunable
L70 > 100,000 hours



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING

Optional Accessories:

V hooks & chain suspending mounting kit


Cable suspending mounting kit

Surface mounting kit

Pendant hanger installation box

Wire guards

Dimensions:

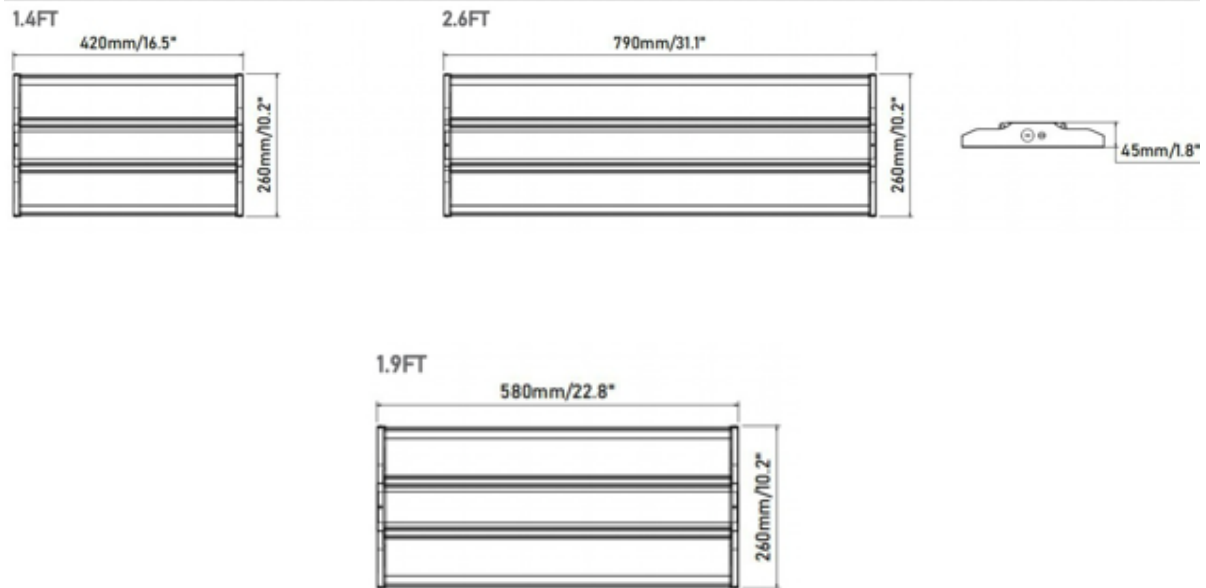

TCL 150 LM/W			4000K		5000K	
Lumen package	Wattage	Size	Lumen output	LM/W	Lumen output	LPW
11000 LM	78	1.4 FT	11700	150	11778	151
14000 LM	92		13800	150	13892	151
17000 LM	115		17250	150	17365	151
20000 LM	135		20250	150	20385	151
23000 LM	155	1.9 FT	23250	150	23405	151
28000 LM	185		27750	150	27935	151
30000 LM	200		30000	150	30200	151
34000 LM	230	2.6 FT	34500	150	34730	151
40000 LM	270		40500	150	40770	151



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM