

# CPS LED LIGHTING

## 5.5"x4' Wrap-around Light



The wrap-around ceiling light is designed to provide a cost effective solution for bright, efficient lighting throughout.

With a large array of applicable locations and minimal upkeep, this fixture makes an excellent choice for a low-maintenance lighting solution.

### ORDER INFORMATION

SERIES	WATTAGE (W)	VOLTAGE UL=120-277V	KELVIN 50=5000K
CPS-WR-	48W	UL-	40
			50
<b>EXAMPLE: CPS-WR-48W-UL-50</b>			
DLC Model# CPS-WR-48W-UL-50			

### SPECIFICATIONS


UL, ETL, cETL Certificate  
IP20 Internal Driver, Input Voltage 120 VAC, 60Hz  
Easy to install and operate  
Long lifespan  
Energy efficient  
Instant start, no flickering, no humming  
Green and eco-friendly




**CPS LED LIGHTING**  
843-407-6803  
SALES@CPSLED.COM  
WWW.CPSLED.COM

# CPS LED LIGHTING

## Lux Chart

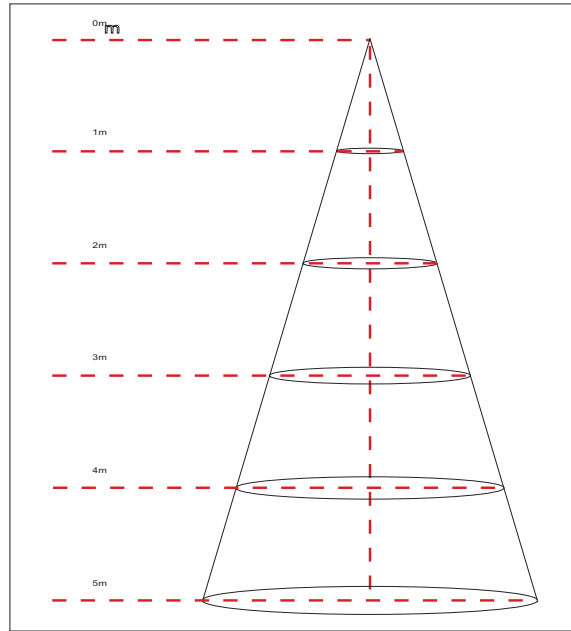

## Photometrics

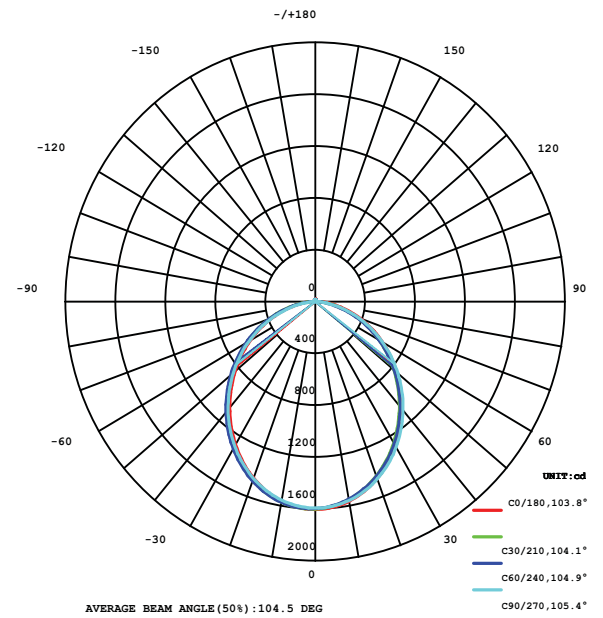

Height	Average Lux (lx)	Light range (dia.)
1M	525.5	258.3cm
2M	131.4	516.6cm
3M	58.4	774.9cm
4M	32.8	1033.2cm
5M	21.0	1291.5cm



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

# CPS LED LIGHTING

## TECHNICAL CHARACTERISTICS

Color temperature	3000K, 4000K, 5000K
Input voltage	120VAC, 60Hz
Lumens	4000 LM
Lumen efficiency	83 LM/W
Waterproof rating	IP20
CRI	>80
PFC	>0.9
Operating temperature	-13°F to 131°F
Application	Indoor
Product Dimensions (Inches)	48*5.5*1.6
L70 Life	30,000 hours
Warranty	5 years

## PACKAGING INFORMATION

Model	Wattage	Product Dimensions (Inches)
CPS-WR	48W	50.2*14.8*12

