

CPS LED LIGHTING

Applications:

Outdoor sports courts

Stadiums


Warehouses

Factories

Workshops

Gymnasiums

Supermarkets

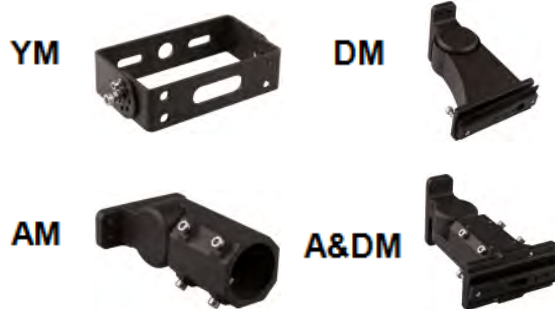

200W Compact Flood

The Compact Flood offers the brightness of a standard flood light, at the added bonus of having a more compact design. This allows it to have a larger variety of applications, as does the selection of different bases.

The light, while also being equipped for large spaces, is eco-friendly and reliable.

ORDER INFORMATION

SERIES	WATTAGE (W)	VOLTAGE UL = 120-277V	KELVIN 50=5000K
CPS-FL-	200W-	UL-	50
EXAMPLE: CPS-FL-200W-UL-XX			
DLC Model# CPS-FL-200W-UL-XX			

SPECIFICATIONS

UL, CUL Certificate
 IP65 internal driver, input voltage 120-347 VAC
 No UV or IR in the beam
 Easy to install and operate
 Long lifespan
 Light is soft and uniform, safe on eyes
 Instant start, no flickering, no humming
 Green and eco-friendly, without mercury



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING

TECHNICAL CHARACTERISTICS


Color temperature	3000K, 4000K, 5000K
Input voltage	AC120-347 50/60Hz
Lumen Efficiency	140-150 LM/W
Waterproof rating	IP65
CRI	>70
PFC	>0.9
Viewing angle	7H6V
Operating temperature	-40°F to 122°F
Operating humidity	10%-90% RH
Storage temperature	-86°F to 176°F
Storage humidity	10%-95%
Application	Indoor/outdoor
Product dimensions	9.13*8.85*5.19
L70 Life	Projected 100,000 hours
Warranty	5 years

LUMENS

3000K	25000-25300 LM
4000K	27000-28000 LM
5000K	26000-27050 LM

MATERIALS

Housing	Aluminum alloy
Housing color	Black
Cover	Lens

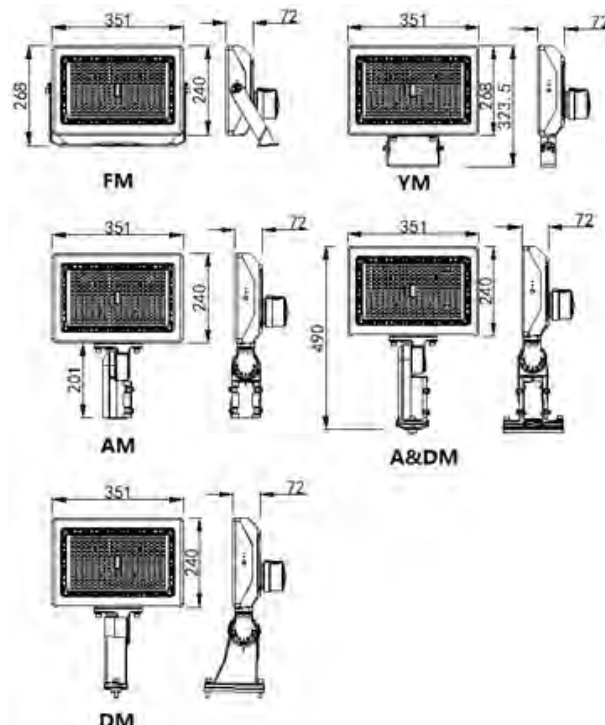

CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING

Luminaire Property

Luminaire Manufacturer:
Voltage: 120.3 V
Power: 201.60 W


Current: 1.683 A
Power Factor: 0.996

Photometric Results


IES Classification: Type II
Total Rated Lamp Lumens: 27053.0 lm
Efficiency: 100%
Upward Ratio: 1%
Central Intensity: 11539.6 cd
Pos of Max. Intensity: H0 V3

Longitudinal Classification: Very Short
Measurement Flux: 27053 lm
Downward Ratio: 99%
Luminaire Efficacy Rating (LER): 135.13
Max. Intensity: 11549.93 cd

Luminous Intensity Distribution Curve

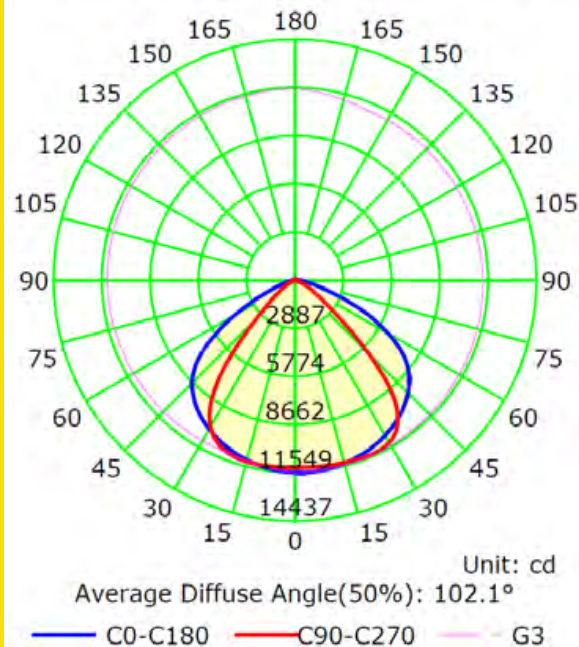

The Average Illuminance Effective Figure

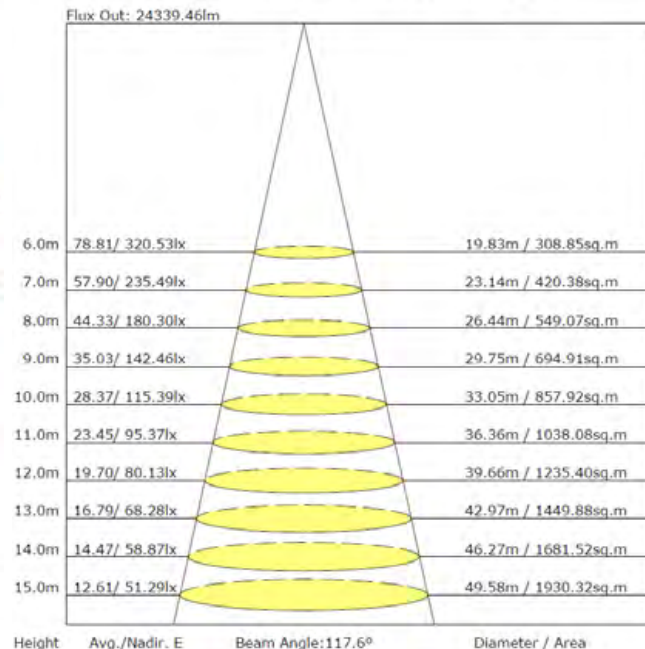


CPS LED LIGHTING
843-407-6803
SALES@CPSLED.COM
WWW.CPSLED.COM

CPS LED LIGHTING

Packing Information

		FM	YM	FM	YM	AM	DM	A&DM
Lamps Net Weight (lbs)		14.1	13.6	14.99	14.55	15.65	16.53	17.63
Inner Box	Size (Inches)	16.73*3.93*15.55						
	Qty/Carton	1 PC						
	Weight/Carton	16.53	16.09					
Outer Box	Size	17.32*16.14*7.87		17.32*16.14*7.87		20.47*15.74*6.29		
	Qty/Carton	2 PCS		1 PC (w/ Photocell)		1 PC		
	Weight/Carton	34.83	33.95	18.51	18.07	18.95	19.84	20.95

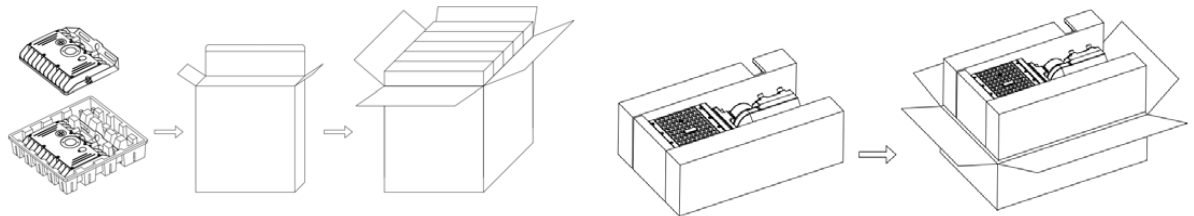

TROUBLESHOOTING

<u>Troubles</u>	<u>Check points</u>
Light flickering	Turn off power and turn on again in three minutes
Not working	Check the connection

NOTICE FOR USER

Please turn off power before installing or changing assembly parts.
The input voltage and lamps should be matched, after connecting the power line.
Please make sure the wiring section is insulated.



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM