

CPS LED LIGHTING

Applications:

Outdoor applications

Warehouses

Building exteriors

Stadiums

Gymnasiums

Supermarkets

Tunable Flood Lights



Available in two sizes, wattage packages range from 75W - 300W so that it can meet various applications. TFL comes with field-adjustable color temperature and power option as well as smart control like photo-cell. It's also available with various mounting options, including slipfitter mount, Yoke mount, and wall mount for flexible installations. IP66 rated.

100%, 75%, 50%, 25% selectable/dimmable.

Ordering Information

Model	Wattage	Voltage (100-277V)	Color Temperature
CPS-TFL-	75W-	UL-	XXK
CPS-TFL-	150W-	UL-	XXK
CPS-TFL-	300W-	UL-	XXK

Specifications

Warranty: 5 Years
Lumens: 150 LM/W
Beam Angle: 65x95°NEMA
Luminous Flux: 75W (11250LM), 150W (22500 LM), 300W (45000LM)
Driver type: constant current
Color temperature: 3000K, 4000K, 5000K adjustable
Color Rendering Index: Ra70
Operating Temperature: -30°C to + 50°C (-22°F to 113°F)
Material & Finish: Aluminum alloy, Akzo powder coating, Black/Bronze
L70 Life: 100,000 hours
Control: Dimmable, Photocell



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM

CPS LED LIGHTING



Mounting Options:

Slipfitter

Yoke

Trunnion

Dimensions			
	75W	150W	300W
Product	233x187x141mm (8.8"x7.4"x5.6")		469x187x185mm(18.5"x7.4"x7.3")
Net Weight	3.4kg (7.48Lbs)		7.9kg (17.38Lbs)
Carton	310x305x255mm (11.8"x12"x10")		540x310x255mm(21.3"x12.2"x10")
Gross Weight	5kg (11Lbs)		9.6kg (21Lbs)

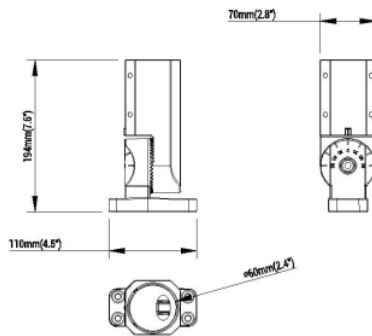

CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM

WWW.CPSLED.COM