


LHBC SELECTABLE HIGH BAY

LED Linear High Bay with Selectable CCT and Lumen


Introduction

- ◆ The LHBC Linear High Bay, is a super compact design using die-cast housing, with the clean and integral structure.
- ◆ Making it saving a lot of shipping cost and easier to install. Standard 6,10KV surge protection, making it steady running under the poor power condition.
- ◆ LHBC offers two levels efficiency, 150lm/w as standard and 170lm/w for high efficiency version.
- ◆ The whole family with two different sizes. Motion sensor and remote controller are available. Also Zhaga base or emergency battery back up is optional.
- ◆ It widely used for warehouse and storage, industrial facilities, sports facilities, gyms and etc.




(90/105/130)W
(115/130/155)W
(155/180/210)W

Wattage Selectable

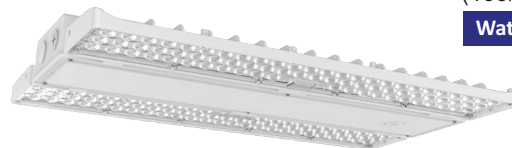

(240/270/310)W

Wattage Selectable

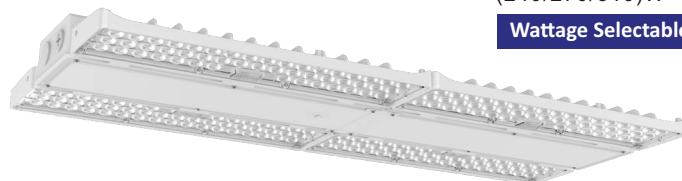

(310/360/420)W

Wattage Selectable

4000K 5000K

CCT SELECTABLE



Features

Construction

- ◆ LHBC linear high bay features a die-cast aluminum housing. Powder coat corrosion resistant finish.

Electrical:

- ◆ 0-10V dimmable driver, which can dim from 100% down to off.
- ◆ Input voltage 120-277V/277-480V for US market, 120-347V for Canada market, and 50/60Hz.
- ◆ Designed to withstand up to L/N-PE:10kV, L-N:6kV surge(120-277V/120-347V/277-480V).

Optics :

- ◆ Single CCT, Selectable CCT 4000K or 5000K (Default setting) , CRI >80.
- ◆ Polycarbonate lens with high angle cut-off design, UGR<28 meet DLC 5.1 premium.
- ◆ General Optic Lens and Aisle Optic Lens are available.

Finish :

- ◆ White color is standard.

Ambient Temperature:

- ◆ -13° F (-25° C) to 122° F (50° C)

Compliances:

- ◆ cULus listed for dry locations.
- ◆ DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Warranty :

- ◆ 5-year limited warranty.

Ordering Guide

EXAMPLE:CPS-LHBC(115/130/155)W-(40/50)KLV-SEM

Brand X	Product series LHBC	Wattage ¹ XXXW	CCT XXK	Input Voltage ³ Y	Sensor X	Emergency Battery Y	Product code ⁴ X
CPS	LHBC	(90/105/130)W (115/130/155)W (155/180/210)W (240/270/310)W (310/360/420)W	40K=4000K 50K=5000K (40/50)K=4000K/5000K ²	LV=120-277V/347V HV=277-480V	S=with Motion sensor or Daylight sensor Blank=without Motion sensor or Daylight sensor	Blank=without emergency E=with emergency	Internal code M - General Efficacy L - General Efficacy H - High Efficacy

Note: 1. (90/105/130)W=130W, 105W, 90W Selectable, 130W default setting. (115/130/155)W=155W, 130W, 115W Selectable, 155W default setting. (155/180/210)W=210W, 180W, 155W Selectable, 210W default setting. (240/270/310)W=310W, 270W, 240W Selectable, 310W default setting. (310/360/420)W=420W, 360W, 310W Selectable, 420W default setting.

2. (40/50)K=4000K, 5000K Selectable, 5000K default setting.

3. The Input Voltage AC120-277V and AC277-480V is for US Market, AC120-347V is for Canada Market only.

4. General Efficacy=150lm/w, High Efficacy=170lm/w, M code only for (115/130/155)W, (155/180/210)W and (310/360/420)W, and L code for (240/270/310)W.

Performance Data


General Efficacy

Model Number	Lumen Level	Wattage Selectable	Nominal CCT	CCT Selectable	@AC120-277V/120-347V			@AC277-480V			CRI
					Lumens	Watts	LPW	Lumens	Watts	LPW	
X-LHBC(90/105/130)W -(40/50)KLV/HV-XY	1	Yes	4000	Yes	14,820	90	165	14,570	90	162	>80
			5000		14,410	90	160	14,240	90	158	
	2		4000		16,960	105	162	16,680	105	159	
			5000		16,500	105	157	16,370	105	156	
	3		4000		20,150	130	155	19,830	130	153	
			5000		19,640	130	151	19,500	130	150	
X-LHBC(115/130/155)W -(40/50)KLV/HV-XYM	1	Yes	4000	Yes	18,580	115	162	18,520	115	161	>80
			5000		18,090	115	157	17,970	115	156	
	2		4000		20,600	130	158	20,530	130	158	
			5000		20,060	130	154	19,930	130	153	
	3		4000		23,820	155	154	23,910	155	154	
			5000		23,250	155	150	23,250	155	150	
X-LHBC(155/180/210)W -(40/50)KLV/HV-XYM	1	Yes	4000	Yes	25,160	155	162	24,850	155	160	>80
			5000		24,540	155	158	24,440	155	158	
	2		4000		28,660	180	159	28,310	180	157	
			5000		27,960	180	155	27,850	180	155	
	3		4000		32,220	210	153	31,950	210	152	
			5000		31,500	210	150	31,500	210	150	
X-LHBC(240/270/310)W -(40/50)KLV/HV-XYL	1	Yes	4000	Yes	39,840	240	166	39,880	240	166	>80
			5000		39,010	240	163	38,980	240	162	
	2		4000		42,740	270	158	42,790	270	158	
			5000		41,850	270	155	41,820	270	155	
	3		4000		47,400	310	153	47,480	310	153	
			5000		46,500	310	150	46,500	310	150	
X-LHBC(310/360/420)W -(40/50)KLV/HV-XYM	1	Yes	4000	Yes	50,290	310	162	50,320	310	162	>80
			5000		49,190	310	159	49,090	310	158	
	2		4000		57,130	360	159	57,330	360	159	
			5000		56,050	360	156	55,940	360	155	
	3		4000		64,250	420	153	64,430	420	153	
			5000		63,000	420	150	63,000	420	150	
X-LHBC(90/105/130)W -XXKLV/HV-XY	1	Yes	4000	No	14,790	90	164	14,250	90	158	>80
			5000		14,850	90	165	14,180	90	158	
	2		4000		16,950	105	161	16,310	105	155	
			5000		16,990	105	162	16,240	105	155	
	3		4000		20,150	130	155	19,630	130	151	
			5000		20,020	130	154	19,370	130	149	
X-LHBC(115/130/155)W -XXKLV/HV-XYM	1	Yes	4000	No	18,230	115	159	18,000	115	157	>80
			5000		18,220	115	158	18,120	115	158	
	2		4000		20,210	130	155	19,960	130	154	
			5000		20,200	130	155	20,090	130	155	
	3		4000		22,940	155	148	22,940	155	148	
			5000		23,250	155	150	23,250	155	150	
X-LHBC(155/180/210)W -XXKLV/HV-XYM	1	Yes	4000	No	24,630	155	159	24,560	155	158	>80
			5000		24,580	155	159	24,390	155	157	
	2		4000		28,060	180	156	27,980	180	155	
			5000		28,000	180	156	27,790	180	154	
	3		4000		31,080	210	148	31,080	210	148	
			5000		31,500	210	150	31,500	210	150	
X-LHBC(240/270/310)W -XXKLV/HV-XYL	1	Yes	4000	No	39,150	240	163	38,920	240	162	>80
			5000		39,120	240	163	38,470	240	160	
	2		4000		42,010	270	156	41,760	270	155	
			5000		41,970	270	155	41,270	270	153	
	3		4000		45,880	310	148	45,880	310	148	
			5000		46,500	310	150	46,500	310	150	
X-LHBC(310/360/420)W -XXKLV/HV-XYM	1	Yes	4000	No	48,870	310	158	49,520	310	160	>80
			5000		48,770	310	157	49,220	310	159	
	2		4000		55,680	360	155	56,420	360	157	
			5000		55,570	360	154	56,080	360	156	
	3		4000		62,160	420	148	62,160	420	148	
			5000		63,000	420	150	63,000	420	150	


High Efficacy

Model Number	Lumen Level	Wattage Selectable	Nominal CCT	CCT Selectable	@AC120-277V/120-347V			CRI
					Lumens	Watts	LPW	
X-LHBC(115/130/155)W-(40/50)KLV-XYH	1	Yes	4000	Yes	21,160	115	184	>70
			5000		20,840	115	181	
	2		4000		23,600	130	182	
			5000		23,110	130	178	
	3		4000		26,870	155	173	
			5000		26,350	155	170	
X-LHBC(155/180/210)W-(40/50)KLV-XYH	1	Yes	4000	Yes	28,480	155	184	>70
			5000		27,900	155	180	
	2		4000		32,450	180	180	
			5000		31,900	180	177	
	3		4000		36,250	210	173	
			5000		35,700	210	170	
X-LHBC(240/270/310)W-(40/50)KLV-XYH	1	Yes	4000	Yes	45,200	240	188	>70
			5000		44,490	240	185	
	2		4000		48,490	270	180	
			5000		47,730	270	177	
	3		4000		53,440	310	172	
			5000		52,700	310	170	
X-LHBC(310/360/420)W-(40/50)KLV-XYH	1	Yes	4000	Yes	56,690	310	183	>70
			5000		55,680	310	180	
	2		4000		64,590	360	179	
			5000		63,440	360	176	
	3		4000		72,600	420	173	
			5000		71,400	420	170	
X-LHBC(115/130/155)W-XXKLV-XYH	1	Yes	4000	No	20,880	115	182	>70
			5000		20,830	115	181	
	2		4000		23,150	130	178	
			5000		23,100	130	178	
	3		4000		26,350	155	170	
			5000		26,350	155	170	
X-LHBC(155/180/210)W-XXKLV-XYH	1	Yes	4000	No	28,340	155	183	>70
			5000		28,100	155	181	
	2		4000		32,280	180	179	
			5000		32,020	180	178	
	3		4000		35,700	210	170	
			5000		35,700	210	170	
X-LHBC(240/270/310)W-XXKLV-XYH	1	Yes	4000	No	44,080	240	184	>70
			5000		44,000	240	183	
	2		4000		47,290	270	175	
			5000		47,200	270	175	
	3		4000		52,700	310	170	
			5000		52,700	310	170	
X-LHBC(310/360/420)W-XXKLV-XYH	1	Yes	4000	No	56,000	310	181	>70
			5000		55,670	310	180	
	2		4000		63,810	360	177	
			5000		63,420	360	176	
	3		4000		71,400	420	170	
			5000		71,400	420	170	

Photometrics



General Optic (as standard offer)



Aisle Optic (lens changing needed)

Power Selection And CCT Selection Capability

Power Setting

Low
Medium
High

CCT Setting

4000K
5000K

Adjust CCT between 4000/5000K, 5000K default setting.

Size	Power Selection	Default Setting
Small 1.2ft	Adjust power between 90/105/130W	130W
	Adjust power between 115/130/155W	155W
	Adjust power between 155/180/210W	210W
Medium 1.7ft	Adjust power between 240/270/310W	310W
Small (combined) 2.4ft	Adjust power between 310/360/420W	420W

Accessories

Sensor

Factory-Installable OR Field-Installable (field-installable purchased separately)





	HD09VR-PH Screw-in PIR Sensor		HD09VR-PHB Screw-in PIR Sensor (Networking Wireless Control Version)
---	---	---	---

Field-Installable / Field-Use ONLY (purchased separately)

	HD06R Remote Control
---	--------------------------------



Emergency Battery Backup

Factory-Installable OR Field-Installable (field-installable purchased separately)

	XEBB05-25WAC Emergency battery backup EMA25FY-170 -25W/90min, for LHBC-90W~210W, at AC-120-277/347V		XEBB06-40WAC Emergency battery backup EMA40FY-170 -40W/90min, for X-LHBC-240W~310W, at 120-277/347V
	XEBB19-40WACHV Emergency battery backup EMA-40500DI-HY -40W/90min, for X-LHBC-90W~210W, at AC277-480V		XEBB20-40WACHV Emergency battery backup EMA-40500DI-HY -40W/90min, for X-LHBC-240W~310W, at AC277-480V

Mounts and Kits

Field-Installable / Field-Use ONLY (purchased separately)

	XSPM-1.5M-A-LHB Suspension Mount - 1.5m hanging length 2pcs (Default Include)		XSM-A-LHB Surface Mount - 2pcs
	XCM-A-LHB Conduit & Surface Mount		AC-LHBE-CK-A Connection Kits
	XSM-A-LHB Wire Guard - small size, 2pcs /set for LHBC-90W~210W, 310-420W (need 4pcs)		XCM-A-LH Wire Guard- medium size, 2pcs/set for LHBC-240W~310W

Lens

Factory-Installable OR Field-Installable (field-installable purchased separately)

	X-LHBC-MilkyLS-S-B Milky Optical Lens -small size for X-LHBC, 1pcs		X-LHBC-MilkyLS-M-B Milky Optical Lens -medium size for X-LHBC, 1pcs
	X-LHBC-AisleLS-S-A Aisle Optical Lens -small size for X-LHBC, 1pcs		X-LHBC-AisleLS-M-A Aisle Optical Lens -medium size for X-LHBC, 1pcs


Electrical Data

Model Series	Wattage(W)	Current (A)					
		Input Voltage (V)					
		120	208	240	277	347	480
X-LHBC(90/105/130)W	90	0.83	0.48	0.42	0.36	0.29	0.21
	105	0.97	0.56	0.49	0.42	0.34	0.24
	130	1.20	0.69	0.60	0.52	0.42	0.30
X-LHBC(115/130/155)W	115	1.06	0.61	0.53	0.46	0.37	0.27
	130	1.20	0.69	0.60	0.52	0.42	0.30
	155	1.44	0.83	0.72	0.62	0.50	0.36
X-LHBC(155/180/210)W	155	1.44	0.83	0.72	0.62	0.50	0.36
	180	1.67	0.96	0.83	0.72	0.58	0.42
	210	1.94	1.12	0.97	0.84	0.67	0.49
X-LHBC(240/270/310)W	240	2.22	1.28	1.11	0.96	0.77	0.56
	270	2.50	1.44	1.25	1.08	0.86	0.63
	310	2.87	1.66	1.44	1.24	0.99	0.72
X-LHBC(310/360/420)W	310	2.87	1.66	1.44	1.24	0.99	0.72
	360	3.33	1.92	1.67	1.44	1.15	0.83
	420	3.89	2.24	1.94	1.68	1.34	0.97


Dimensions & Weight

90-210W(1.2ft)


Regular

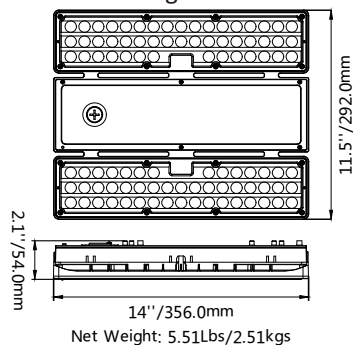


With Sensor

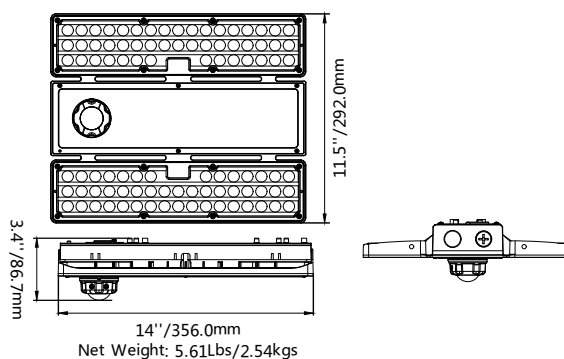

With Emergency Battery Backup & Sensor

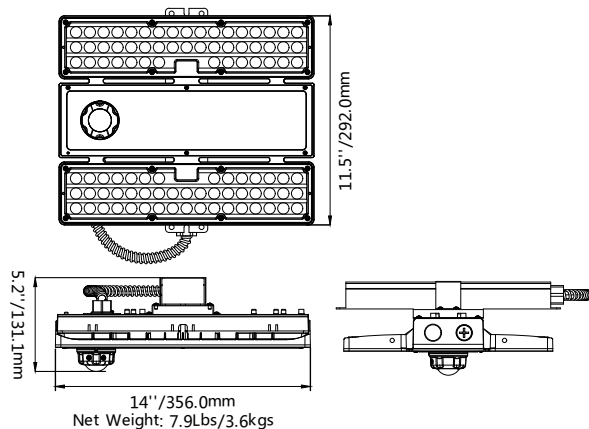


With Conduit & Surface Mount Kit & Sensor

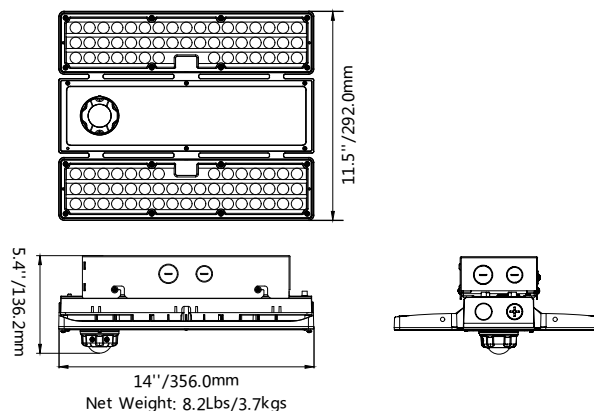


240-310W(1.7ft)


Regular

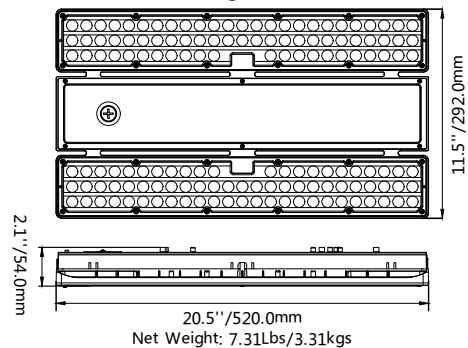


With Sensor

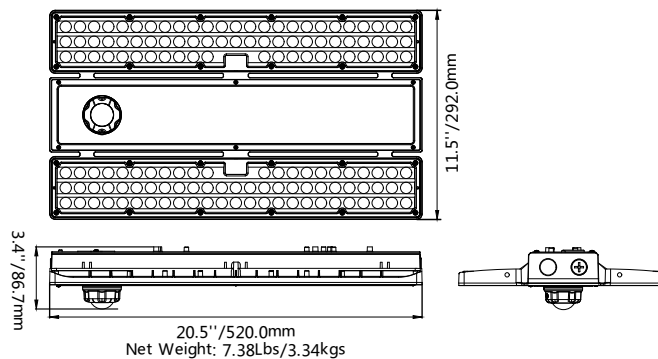


With Emergency Battery Backup & Sensor

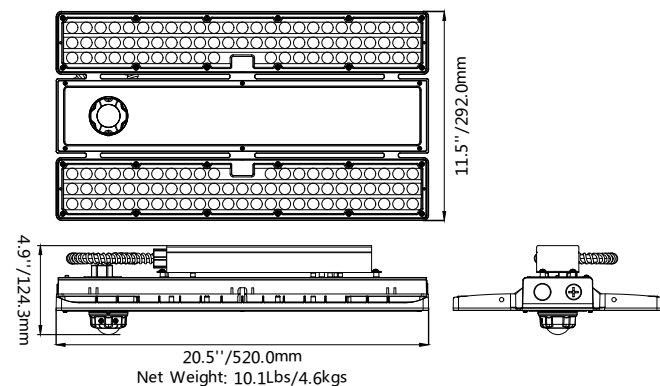

With Conduit & Surface Mount Kit & Sensor

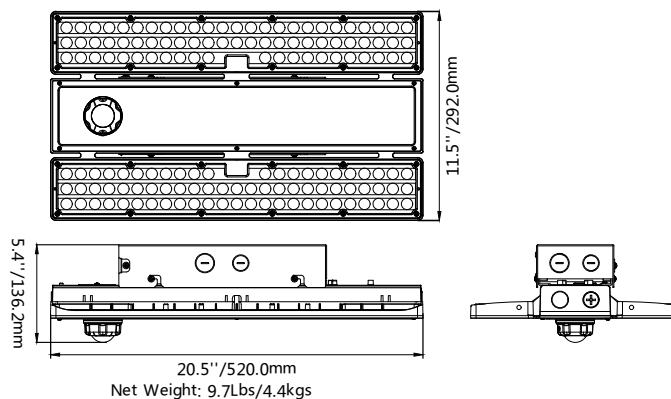

310-420W(2.4ft)
Regular

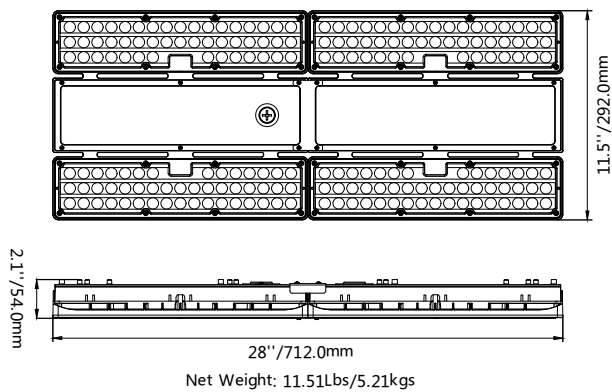

With Sensor

