

# CPS LED LIGHTING

## Applications:

Entrance Lighting

Courtyard Lighting

Outdoor Lighting

Industrial Lighting

Hotel Lighting

## Full Cut-Off Tunable Wallpack



Available in one size with power ranging from 26W to 135W. This fixture can replace up to 400W MH. Tunable wattage and color temperatures allow for sku reduction and uniformity.

### Order Information

Series	Wattage (W)	Voltage UL=120-277	Color	Kelvin
CPS-FCW-	26/38/65/100W-	UL-	BR, BL, W-	3000K, 4000K, 5000K

Example: CPS-FCW-XXW-UL-BL-XXK

### Specifications

Warranty: 5 years
Power Factor: >0.9
Suitable for operation in -40 C to 40 C
Operating with emergency battery temperature range: 10C to 40C (+50F - + 104F)
CRI: 70
Voltage: 120-277V
Photocell & sensor available
0-10V Dimming
Lumen packages from 3,800 to 20,000 lumens
Housing: Dark Bronze (BR), Black (BL), or White (W)




**CPS LED LIGHTING**

843-407-6803


SALES@CPSLED.COM

WWW.CPSLED.COM

# CPS LED LIGHTING

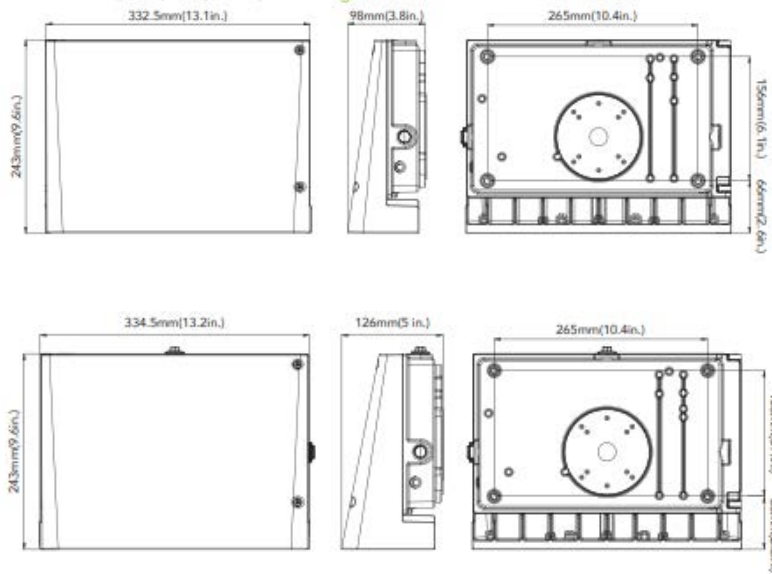

## PHOTOMETRICS

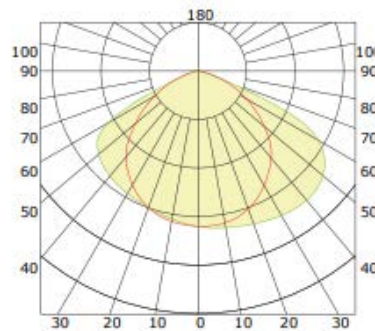

		26W		38W		65W		100W	
SETTING	VOLTAGE	WATTS	LUMENS (5000K)	WATTS	LUMENS (5000K)	WATTS	LUMENS (5000K)	WATTS	LUMENS (5000K)
100%	120-277V	26.45	3918.10	38.12	5690.70	64.93	9816.80	103.20	14950.00
80%	120-277V	21.42	3374.27	30.95	4871.24	49.30	7873.07	84.21	12725.44
60%	120-277V	15.50	2502.50	23.01	3697.60	34.47	5782.90	61.92	9548.57
40%	120-277V	11.31	1882.00	16.89	2789.20	23.37	4042.90	42.83	6667.70



**CPS LED LIGHTING**  
 843-407-6803  
 SALES@CPSLED.COM  
 WWW.CPSLED.COM