

CPS LED LIGHTING

Applications:

Entrance lighting

Courtyards

Outdoor landscape

Industrial

Hotels

Tunable Wallpaper Series



The tunable wallpack is versatile and efficient with a high end design. Power and CCT tunable helps to reduce sku's and fit many applications. Easy installations without opening the driver box and accessories available.

Ordering Information

SERIES	WATTAGE	VOLTAGE	HOUSING COLOR	CCT - TUNABLE
CPS-TWP-	27W-	UL-	BL-	3000/4000/5000K
CPS-TWP-	45W-	UL-	BL-	3000/4000/5000K
CPS-TWP-	62W-	UL-	BL-	3000/4000/5000K
CPS-TWP-	70W-	UL-	BL-	3000/4000/5000K
CPS-TWP-	100W-	UL-	BL-	3000/4000/5000K

Specifications

120-277VAC Input Voltage (UL)
1-10V Dimming
Power factor: > 90%, THD <20%
Operation Temperature Range: -40°C to 40°C (-40°F - + 104°F)
Operating with emergency battery temperature range: 10°C to 40°C (+50°F-+ 104°F)
Lumen output adjustable: 3,200 - 13,200 LM
UV stabilized polycarbonate and glass are both available for the optic lens
Sealed die casting profile for outdoor applications
Suitable for applications requiring 3G vibration tests according to ANSI C136.31
Warranty: 5 years
CRI: 70
Accessories available: photocell, sensors, emergency backup



CPS LED LIGHTING

843-407-6803

SALES@CPSLED.COM






WWW.CPSLED.COM

CPS LED LIGHTING



Adjustable lumen output

SETTING	DIFFUSER	27W		45W		62W		70W		100W	
		SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)	SYSTEM WATTS	LUMENS (5000K)
100%	PC Diffuser	26.60	3469.90	45.22	5495.70	63.73	7814.20	71.61	9246.60	100.90	12468.10
80%	PC Diffuser	20.77	2805.82	33.79	4341.60	52.19	6640.51	53.90	7434.27	78.80	10160.25
60%	PC Diffuser	15.38	2163.14	26.24	3527.69	39.29	5255.05	41.63	6018.61	61.62	8581.79
40%	PC Diffuser	9.86	1428.21	17.76	2514.28	26.07	3675.80	27.89	4257.13	40.83	6089.42
100%	Glass Diffuser	26.65	3323.90	45.17	5404.30	63.54	7712.70	70.26	9106.60	100.00	12216.90
80%	Glass Diffuser	20.81	2687.71	33.75	4269.40	52.03	6554.25	52.88	7321.71	78.10	9955.55
60%	Glass Diffuser	15.41	2072.12	26.21	3469.02	39.17	5186.79	40.85	5927.49	61.07	8408.89
40%	Glass Diffuser	9.88	1368.12	17.74	2472.47	25.99	3628.05	27.36	4192.68	40.47	5966.73

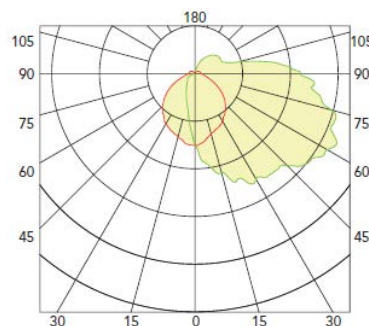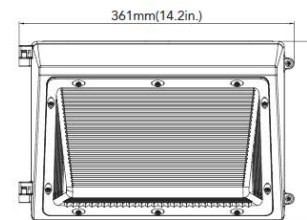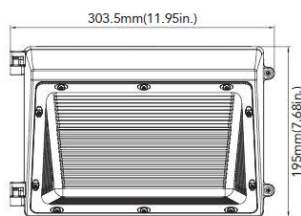

CPS LED LIGHTING
843-407-6803
SALES@CPSLED.COM
WWW.CPSLED.COM