



5.5"x4' WRAPAROUND LIGHT

CPS LED Lighting 5.5"x4' WRAPAROUND LIGHT, 48 watt 4000 Lumen, ETL/cETL

Specifications

Model#	CPS-WR-48W-UL-40 CPS-WR-48W-UL-50
Description	5.5"x4' WRAPAROUND LIGHT
Power	48W
Voltage Input	120Vac,60HZ
Lumen output	4000lm
CCT	3000K,4000K,5000K
CRI	Ra>80
Housing	Steel base white powder coating
Application	Indoor Only
Driver	UL certified
Lens	PC
Operating Temp.	-25 C ~ 55 C
IP Rating	IP20
Certificates	ETL/cETL
warranty	5 years
Dimmable	No
Product Dimension	48"L x 5.5"W x 1.6" H (1220mm x 140 x 52 mm)
L70 Life	>30,000 hours




Order Information

Item Number	Description	Power	Voltage Input	Driver	CCT	Lumen Output	Certificates
CPS-WR-48W	5.5"x4' WRAPAROUND LIGHT	48W	120-277Vac	UL Certified	4000K,5000K	4000lm	ETL/cETL


"XX"- standard for color temperature, 30-3000K,40-4000K,50-5000K.

Lux Chart

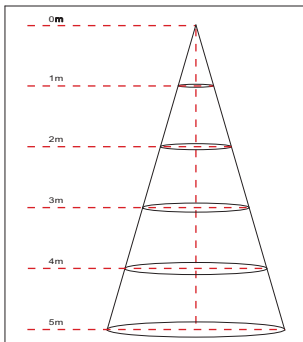

Height	Average Lux (lx)	Light range (dia.)
1M	525.5	258.3cm
2M	131.4	516.6cm
3M	58.4	774.9cm
4M	32.8	1033.2cm
5M	21.0	1291.5cm

Photometrics

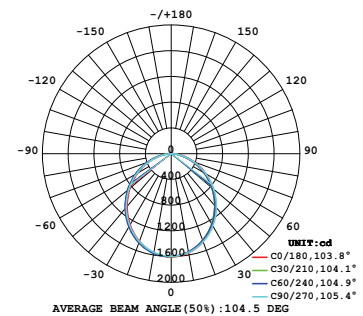

LM79
LM80






5.5"x4' WRAPAROUND LIGHT


CPS LED Lighting 5.5"x4' WRAPAROUND LIGHT, 48 watt 4000 Lumen, ETL/cETL

Product Size

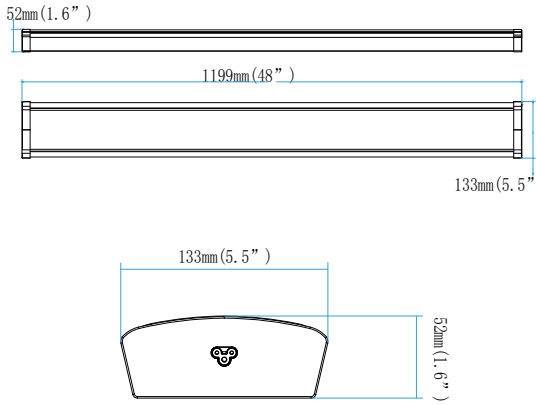


Packaging


8pcs/CTN G.W.:
Dimension: 50.2"L x 14.8"W x 12"H (1275mm x 375mm x 305mm)

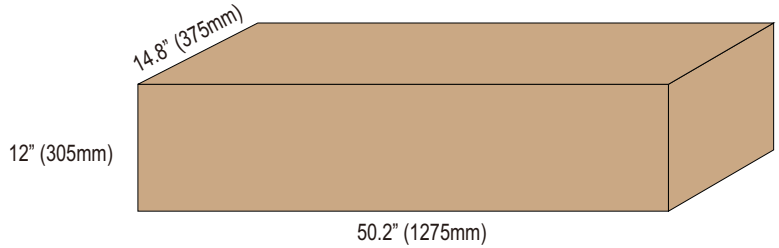


Container Loading QTY

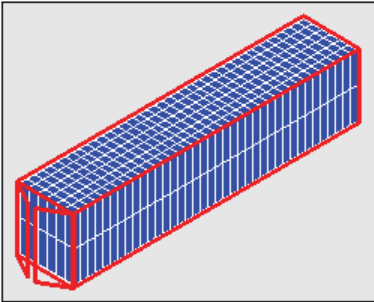

Size	Corton QTY	Product QTY	Volumn
40'hq	456 ctn	3648 pcs	71.1m ³

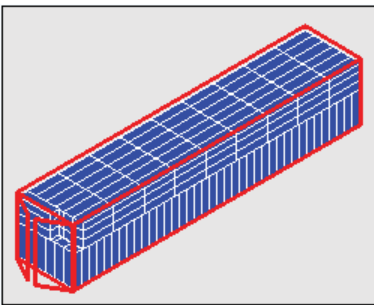

Size	Corton QTY	Product QTY	Volumn
40'gp	393 ctn	3144 pcs	61.24 m ³

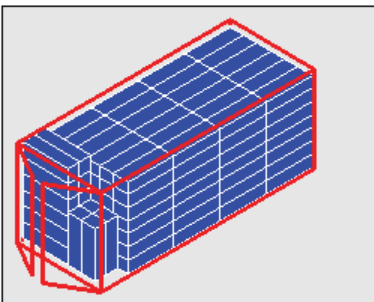

Size	Corton QTY	Product QTY	Volumn
20'gp	184 ctn	1472 pcs	28.67 m ³



LM79
LM80

